94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.2500Sf **4-Way, 0º SMA female**

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
800–2500MHz	0.6dB max	+/-6º max	1.3:1 max	0.6dB max	20dB min

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: SMA female 5 places**
c. **Power: Forward 50 W CW Reverse: 1 W**
d. **Case material: Aluminum alloy w/clear iridite finish**
e. **Operation temperature: -55C to +85C deg**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

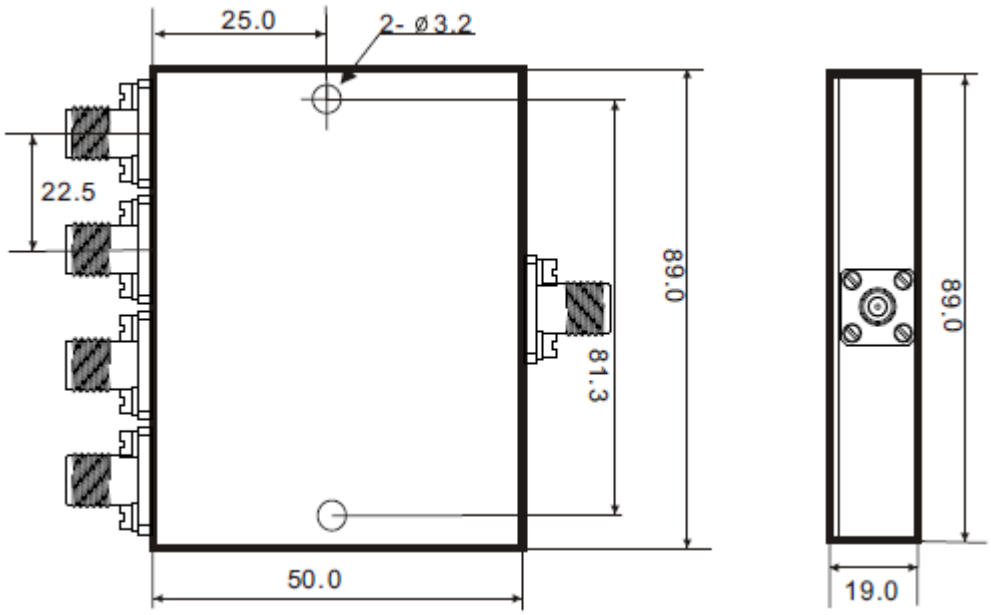

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com