94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD4.29-31.292f 4-Way, 2.92mm Female

Electrical Specifications:

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
29 – 31GHz	0.6dB max	+/- 6° max	1.60:1 max	2dB max	15dB min

Notes:

a. Input and output impedance: 50Ω
b. Connectors: 2.92mm female 5 places, SS/P
c. Power Handling: 20 Watt max Input, 1 Watt Output
d. Housing Material: Aluminum Alloy, black paint
e. Operation temperature: -55 ºC to +85ºC

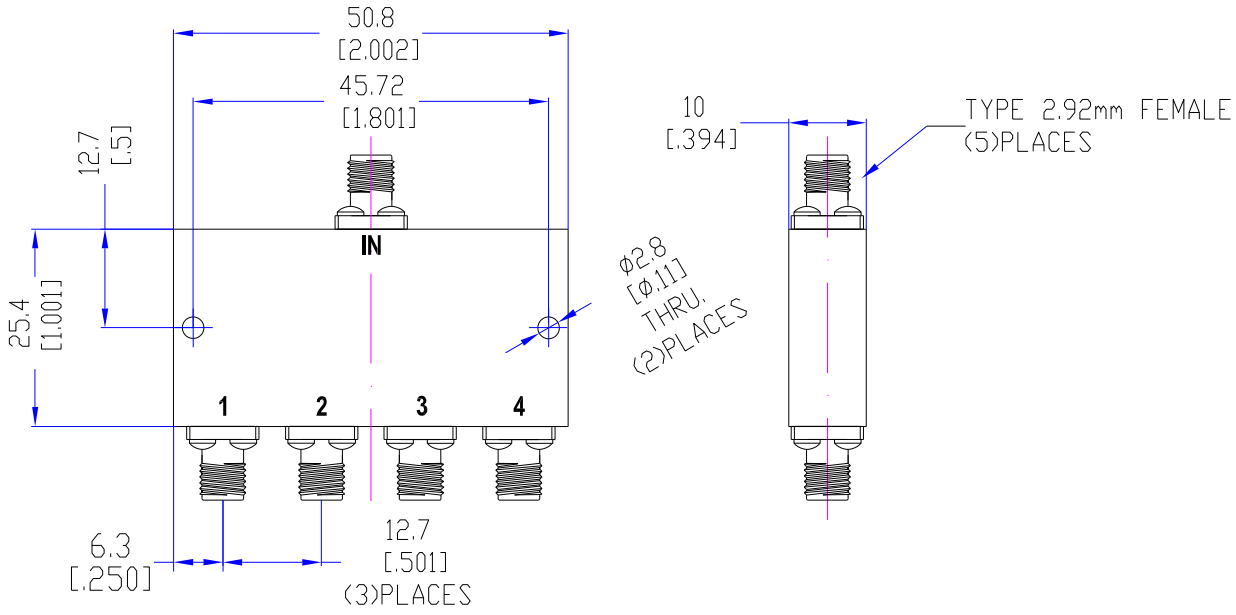

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com