



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD4.3000-3500Sf

4-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
3000-3500MHz	0.1dB max	+/- 2° max	1.30:1 max	0.45dB max	23dB min

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 5 places (N available on request)
- Power: Forward 40 W CW Reverse ,1W CW
- Case material: Aluminum alloy w/clear iridite finish
- Operation temperature: -55°C to +85°C

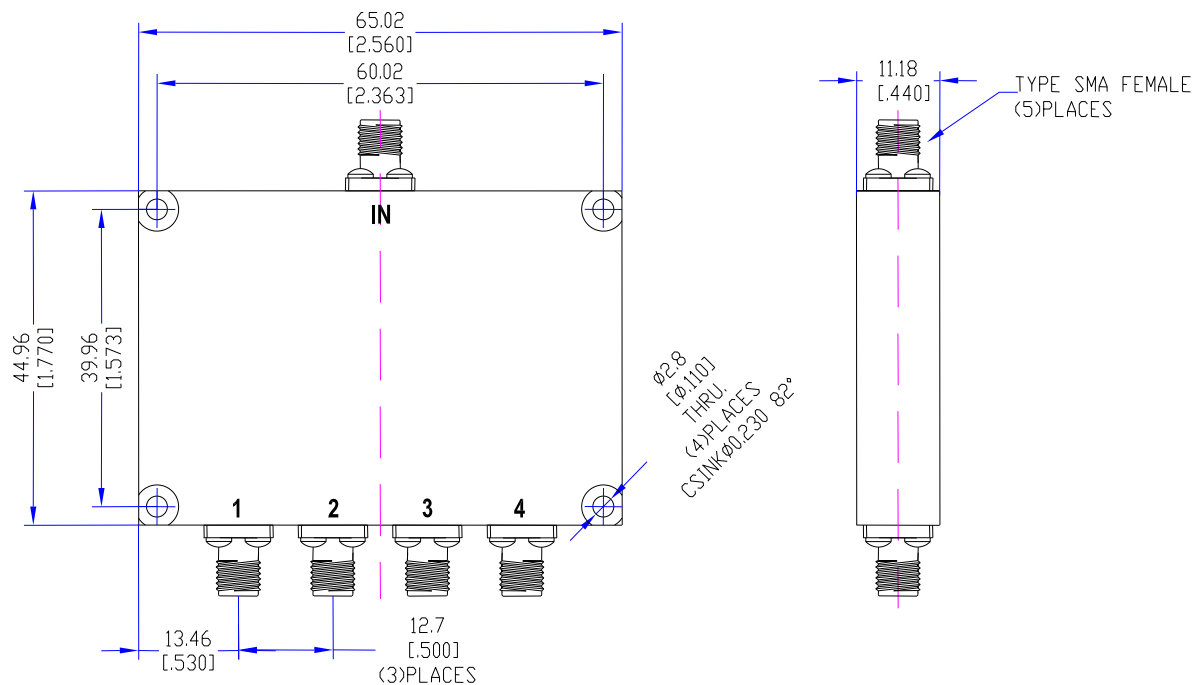

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com