



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD4.3000Sf

4-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
600-3000MHz	0.5dB max	+/- 5° max	1.45:1 max	1.0dB max	20dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 5 places (N available on request)
- Power: Forward 50 W CW Reverse ,1W CW
- Case material: Aluminum alloy w/clear iridite finish
- Operation temperature: -55C to +85C deg

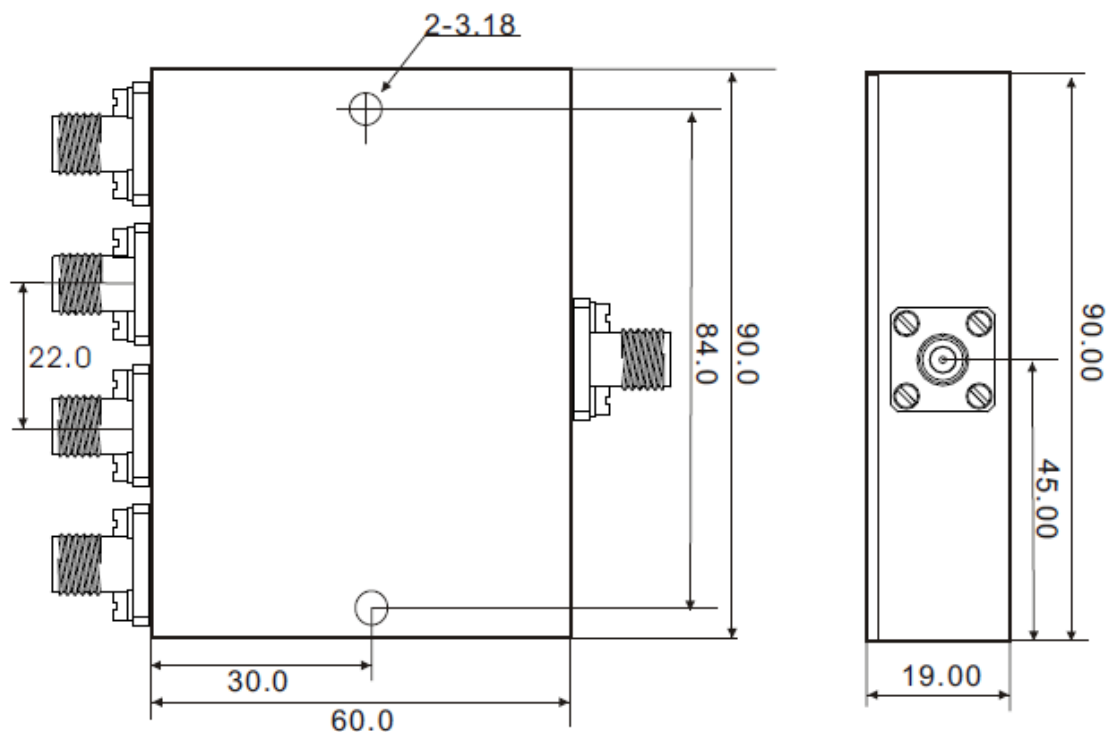

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com