4way Power combiners/splitters

Model	Freq. Range (Mhz) F_L-F_U	Insertion Loss(dB)	Isolation (dB)	VSWR	Unbalance	
					Phase (Deg)	Amplitude(dB)
		Typ/Max	Typ/Min	Typ/Max	Max	Max
RMPD4-03825S	380-2500	0.8/1.6	20/18	1.3/1.6	4	0.4

Note:

a. Input and output impedance: 50 Ohms
b. Connector: SMA-Female
c. Power Handling: ≤25W
d. Case material: Aluminum alloy.
e. Guarantee: 12 months
f. Operation temperature:-35°C-+75°C
g. RoHS compliant
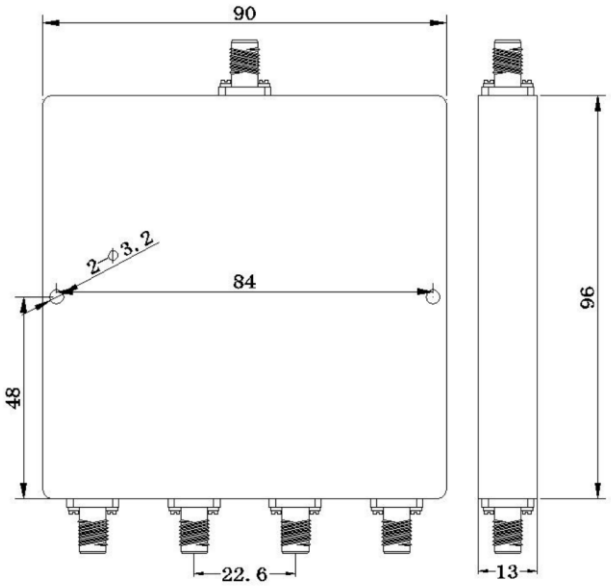
Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS