94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.4000-8000Sfb 4-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
4 – 8 GHz	0.3dB max	+/- 3º max	1.30:1 typ	0.8dB max	18dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 5 places stainless/passivate**
c. **Power: Forward 30 W CW Reverse: 1 W**
d. **Case material: Aluminum alloy w/black epoxy resin paint**
e. **Operation temperature: -55°C to +85°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: ***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

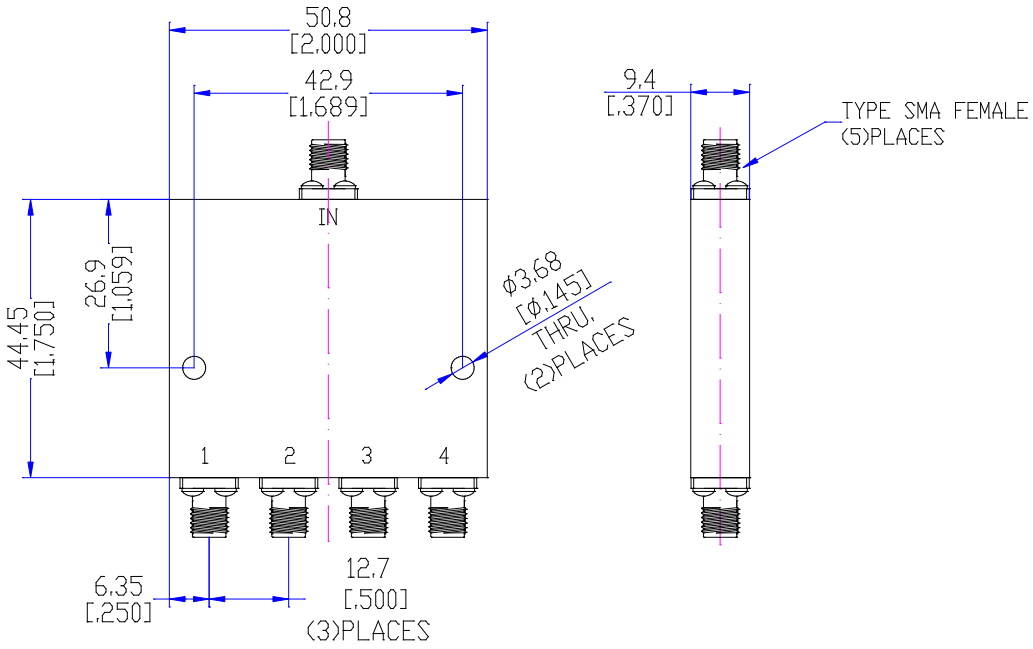

All specifications are subject to change without notice. All tolerances +/-0.2mm.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com