1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider/Splitters

Model RMPD4-4000SF 4-way Power Divider SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	VSWR	Amplitude Unbalance
2000-4000MHz	0.8dB max	20dB min	4° max	1.4:1 max	0.4 dB max

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: SMA female (5 places)**
c. **Power: input: ≤ 1 W**
d. **Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.**
e. **Operation temperature: -35C to +80C deg**

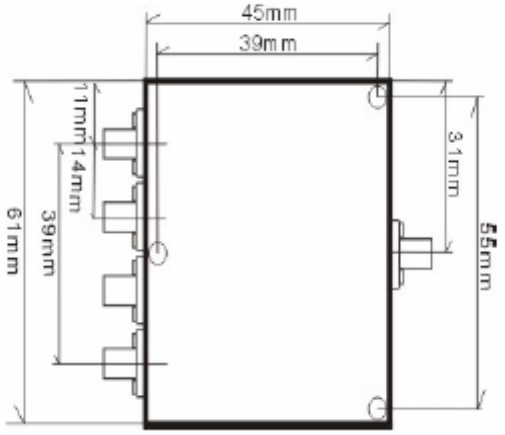

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05