94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.500-2500Sfa 4-Way, High Power

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
500-2500MHz	0.3dB max	+/- 3º max	1.30:1max	0.9dBmax	18dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 5 places (male available on request)
c. Power: Forward 100W CW Reverse: 10W
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -25°C to +65°C

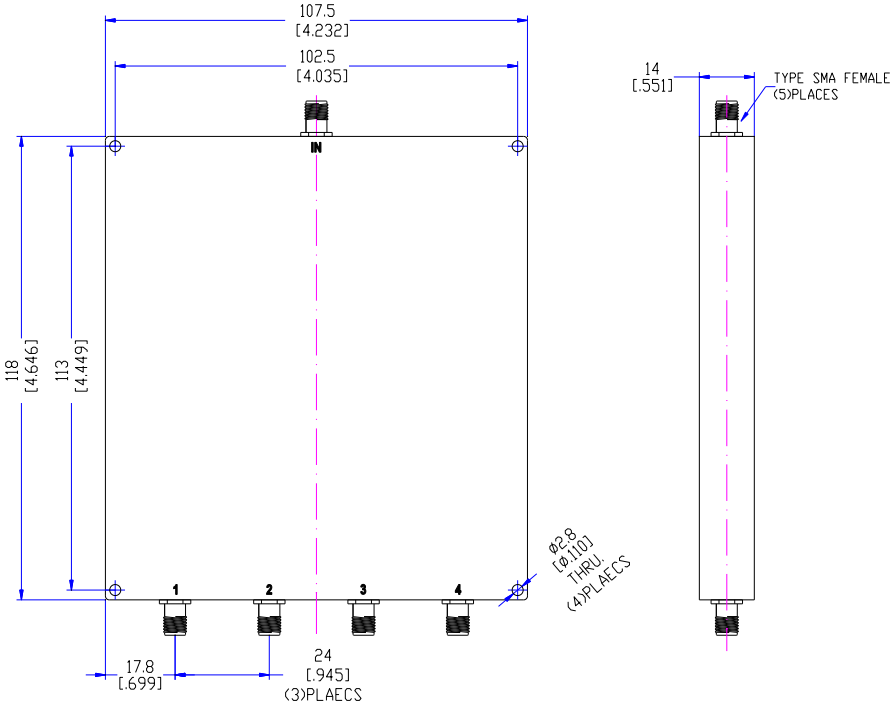

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com