94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.500-6000Nfa 4-Way, 0º N female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
500-6000MHz	0.6dB max	+/- 6º max	1.5:1 max	1.6dB max	18dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female 5 places**
c. **Power: Forward 35 W CW , Reverse 2 W CW**
d. **Case material: Aluminum alloy w/clear iridite**
e. **Operation temperature: -55°C to +85°C**

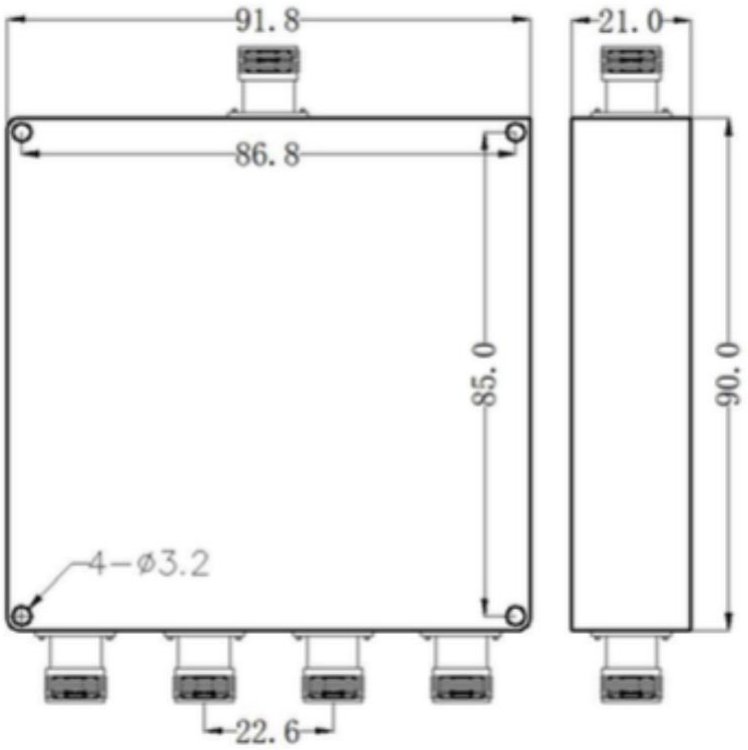

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com