94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.500-6000Nfb 4-Way, 0º N female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
500-6000MHz	0.6dB max	+/- 6º max	1.5:1 max	1.6dB max	18dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: N female 5 places
c. Power: Forward 35 W CW , Reverse 2 W CW
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -55°C to +85°C

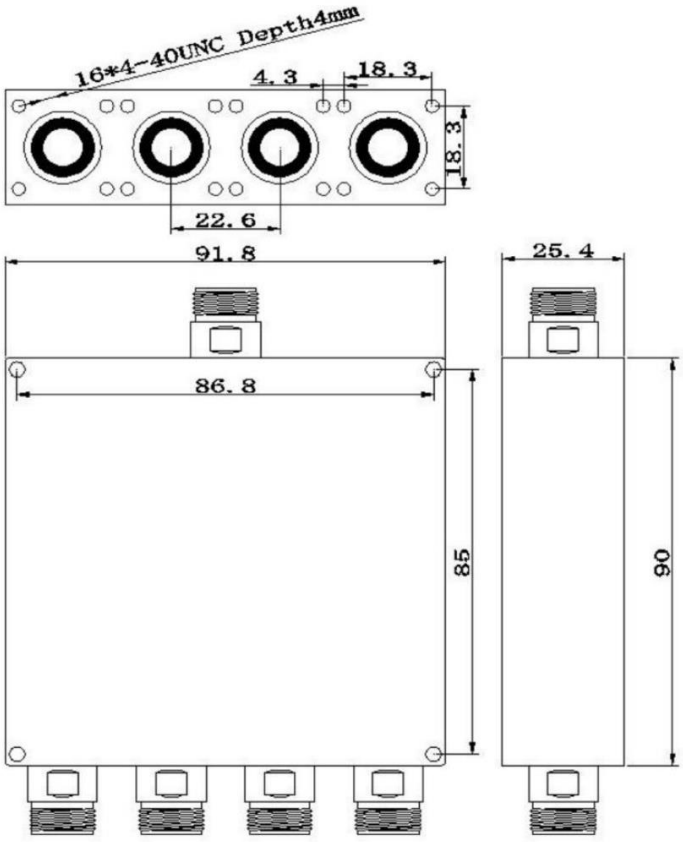

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com