



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD4.500-6000Sfa

4-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
500-6000MHz	0.5dB max	+/- 3° max	1.5:1 max	1.5dB max 0.7dB typ	16dB min

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 5 places
- Power: Forward 10 W CW
- Case material: Aluminum alloy w/iridite finish
- Operation temperature: -55°C to +85°C

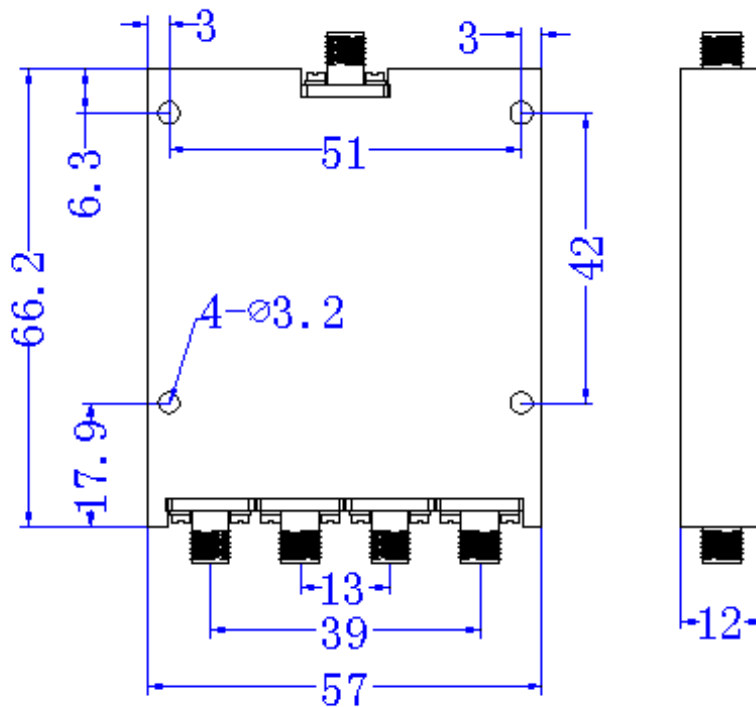

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com