94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD4.500-8000Nf 4-Way, Broadband

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 0.5 – 8GHz | 0.8dB max | +/-7° max | 1.7:1 max | 1.6dB max | 15dB min |

**Notes:**

a. Input and output impedance: 50Ω
b. Connector: N female 5 places
c. Power: Forward 35 W CW Reverse 1W CW
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -55°C to +85°C

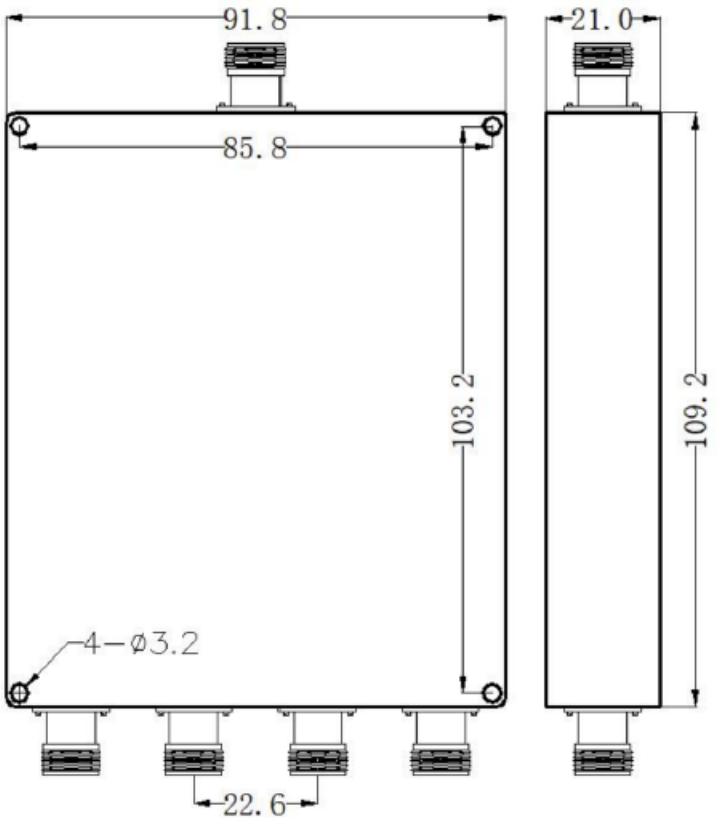


*Dimensions in mm. All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com