94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.500-8000Sf 4-Way, Broadband

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.5 – 8GHz	0.8dB max	+/-7° max	1.7:1 max	1.6dB max	15dB min

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 5 places
c. Power: Forward 35 W CW Reverse 1W CW
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -55°C to +85°C

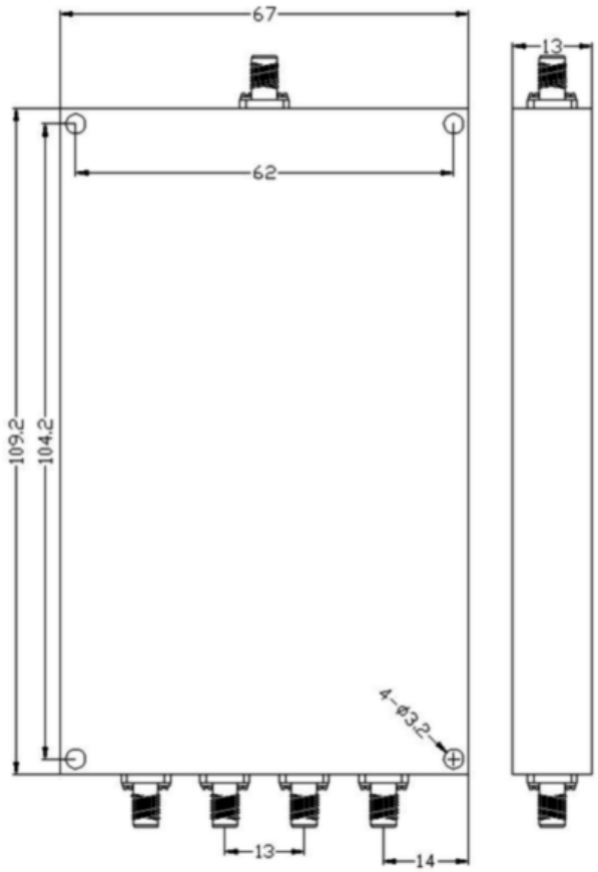

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com