



94 Jackson Road Suite 110 Devens, MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD4.6-18Sf


4-Way Power Divider SMA Female

Electrical Specifications:

Frequency GHz	Insertion Loss (dB)	Isolation (dB)	VSWR	Unbalance +/-		
	max	min	max	Phase °		Amp (dB)
6-18	1.0	18	1.5:1	3		0.3

Notes:

- Input and output impedance: 50 Ω
- Connectors: SMA Female 5 places
- Power Handling: 30 Watt max Input, 1 Watt Output
- Housing Material: Aluminum Alloy w/black paint
- Operation temperature: -55 °C to +85°C

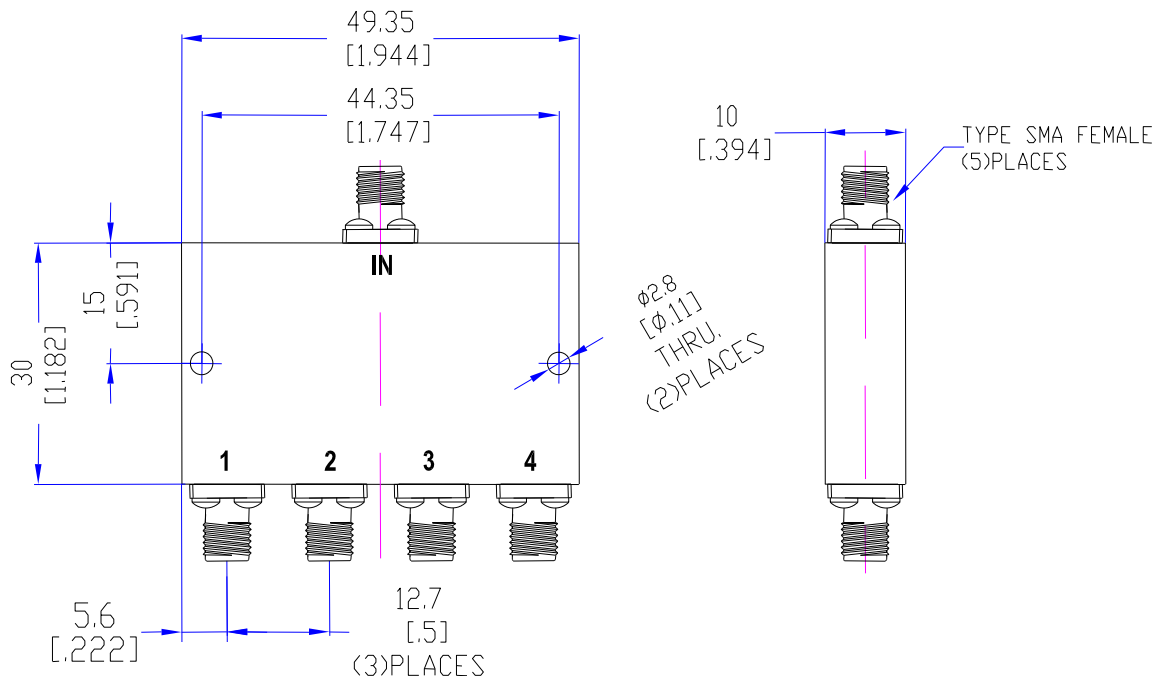

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com