94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Power Combiner/Divider

## Model RMPD4.620-640Sf 4-Way, SMA female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR | Insertion Loss | Isolation |
|---|---|---|---|---|---|
| 620–640MHz | 0.2dB max | +/-2º max | 1.3:1 max | 0.6dB max | 20dB min |

**Notes:**

a. Input and output impedance: 50 Ω
b. Connector: SMA female 5 places
c. Power: Forward 30 W CW Reverse 1W CW
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -55°C to +85°C

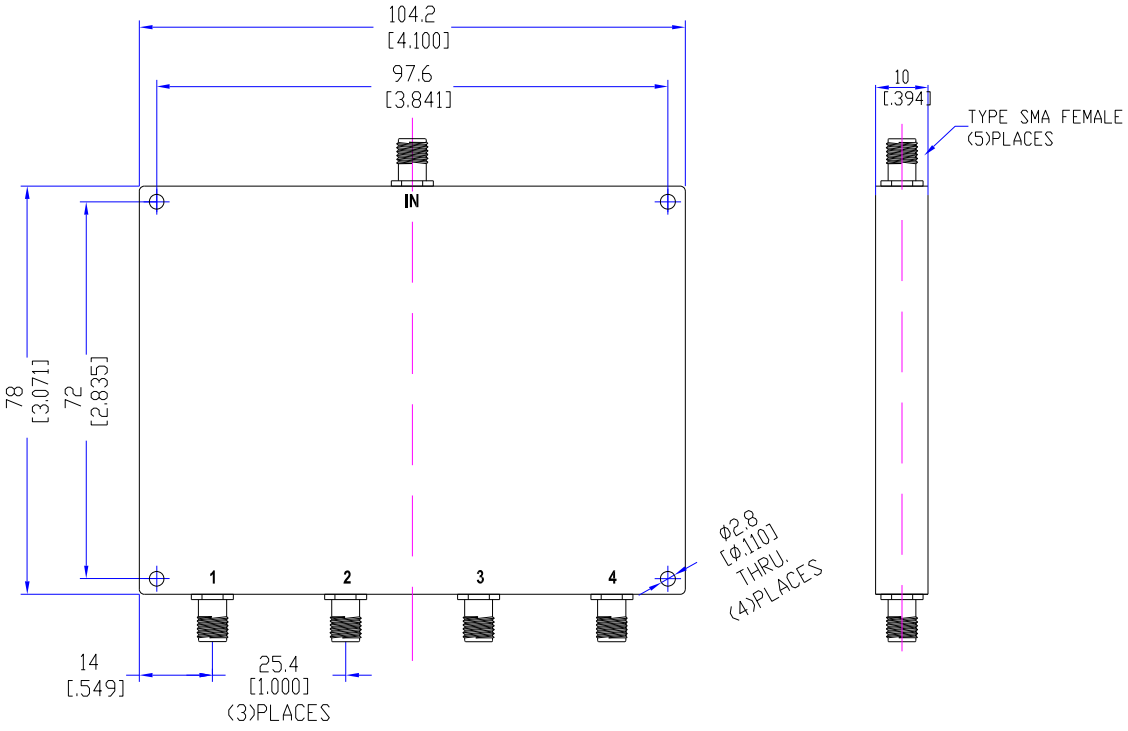


*Dimensions in mm. All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**
www.responsemicrowave.com