94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.700-2200Nfa 4-Way, 0º N female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
700-2200MHz	0.25dB max	+/- 2.5º max	1.3:1 max	0.8dBmax	21dB min

Notes:

a. **Input and output impedance: 50Ω Ohms**
b. **Connector: N female 5 places**
c. **Power: Forward 30W CW Reverse: 2W per port**
d. **Case material: Aluminum alloy w/clear iridite finish**
e. **Operation temperature: -40°C to +85°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

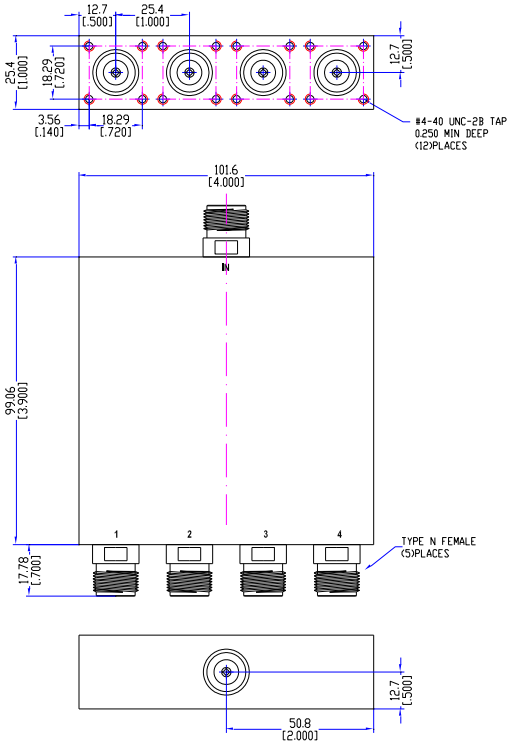

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com