1257 WORCESTER ROAD #329, FRAMINGHAM, MA 01701

Power Divider / Splitters

Model RMPD4-9000SF **4 way Power Divider SMA female**

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
7000-9000MHz	0.5dB max	20dB min	1.35:1typ	6° max	0.4 dB max

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: SMA female**
c. **Power: 25w forward, ≤ 1 W reverse**
d. **Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.**
e. **Operation temperature: -35C to +85C deg**

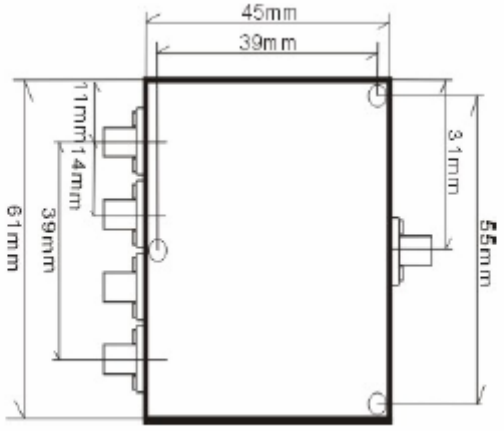

All specifications are subject to change without notice.

Telephone: 978-456-9184 **Fax: 978.456.9188**

www.responsemicrowave.com

Rev 7/25/05