



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD6.1000-5000Sfa

6-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
1-5 GHz	0.7dB max	+/-8° max	1.60:1 max	2 dB	16dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 7 places
- Power: Forward 20 W Reverse: 0.5W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55C to +85C deg

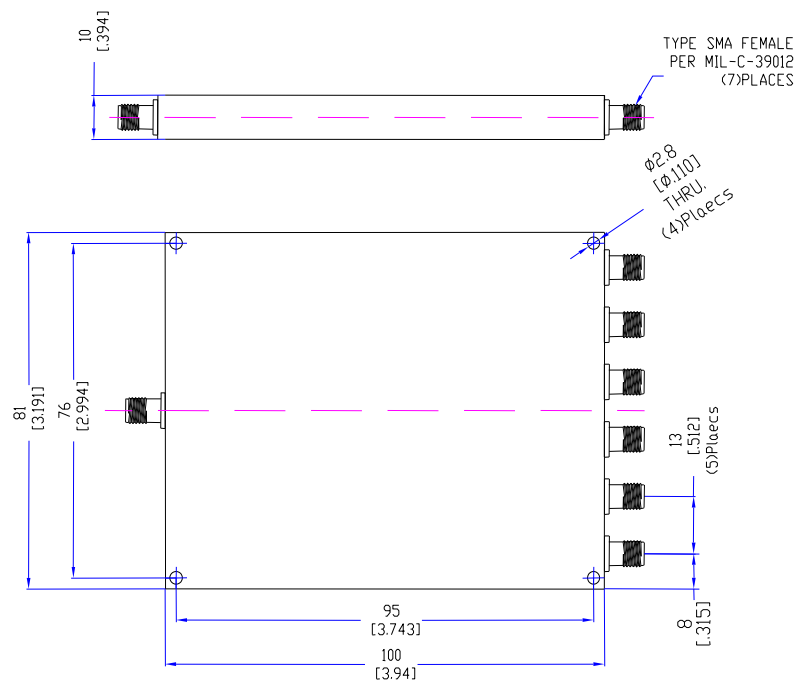

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com