94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD6.400-500.Nf **6-Way, 0º N female**

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR (Typ/Max)	Insertion Loss (Typ/Max)	Isolation (Min/Typ)
400-500MHz	0.6dB max	+/-5º max	1.20/1.50:1	0.4/0.7dB	20/23dB

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: N female 7 places
c. Power: Forward 35 W Reverse: 1W
d. Case material: Aluminum alloy with iridite finish
e. Operation temperature: -55C to +85C deg

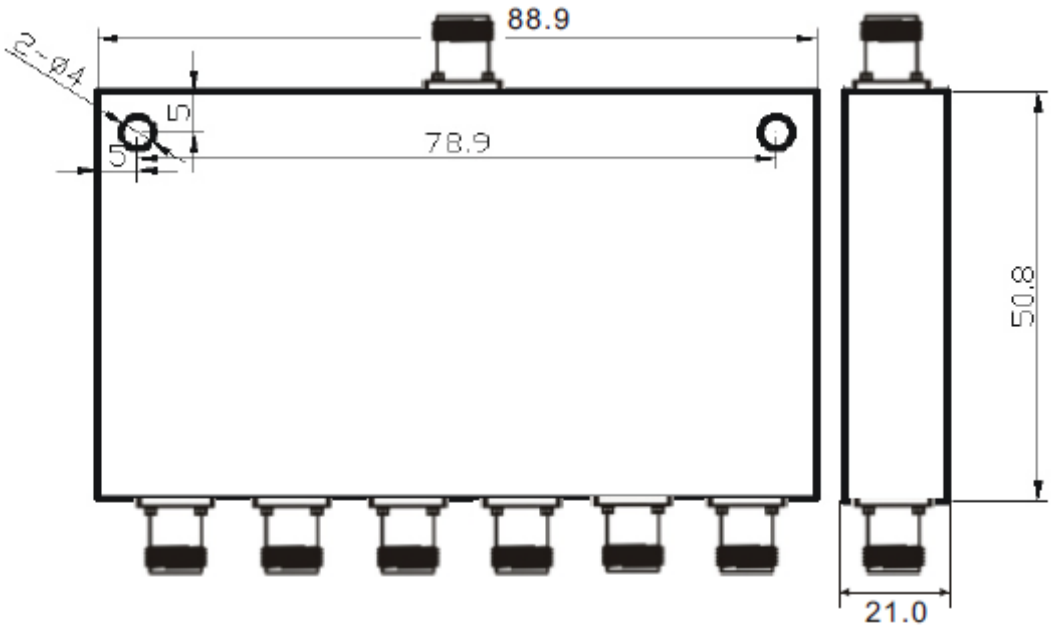

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com