


Model RMPD6.800-2500Nf

6-Way, N female

Notes:

- a. **Input and output impedance: 50 Ohms**
- b. **Connector: N female 7 places (male available on request)**
- c. **Power: Forward 35 W CW Reverse: 1 W**
- d. **Case material: Aluminum alloy w/clear iridite**
- e. **Operation temperature: -35C to +80C deg**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

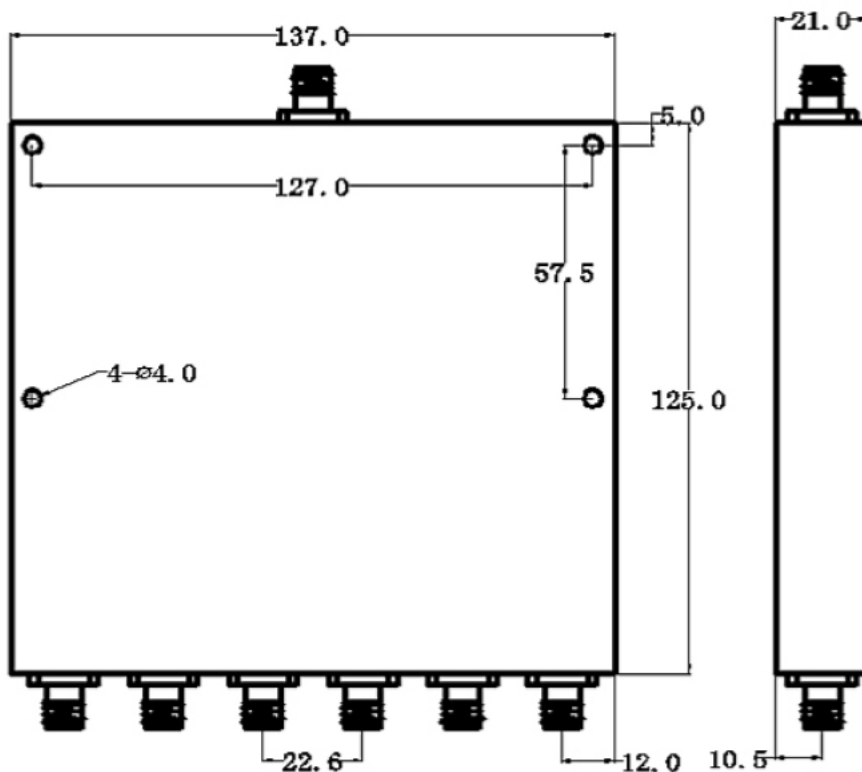

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com