94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD8.1-18Sf 8-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
1 – 18GHz	0.6dB max	+/-8º max	1.60:1 max	3.8dB max	16dB min

Notes:

a. Input and output impedance: 50 Ω
b. Connector: SMA female 9 places
c. Power: Forward 30W CW Reverse 1W CW
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -55°C to +85°C

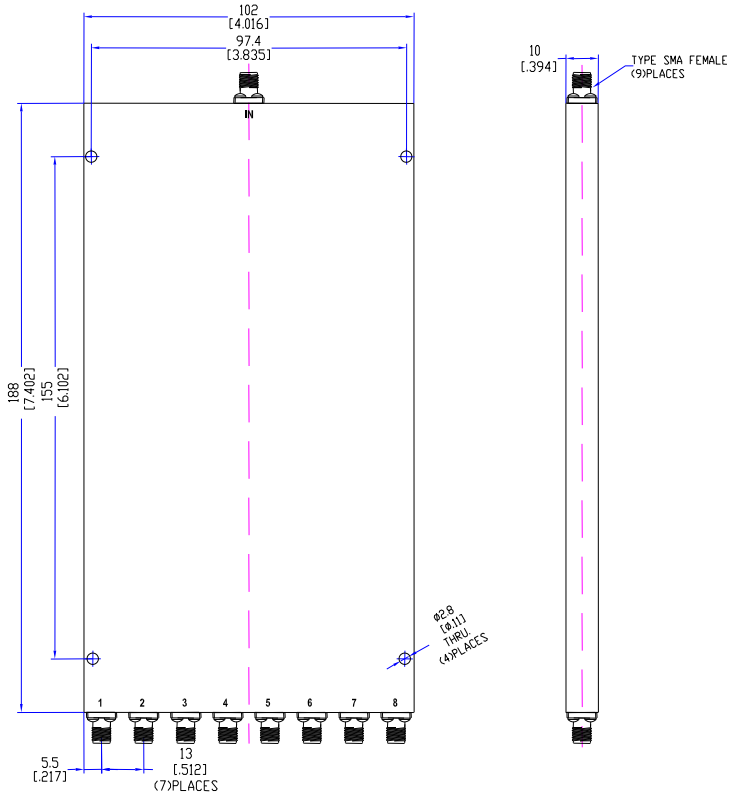

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com