



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD8.1000-2000Sf


8-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
1 – 2GHz	0.3dB max	+/- 3° max	1.30:1 max	0.8dB max	20dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 9 places
- Power: Forward 30 W CW Reverse 1 W CW
- Case material: Aluminum alloy w/black paint
- Operation temperature: -40°C to +85°C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

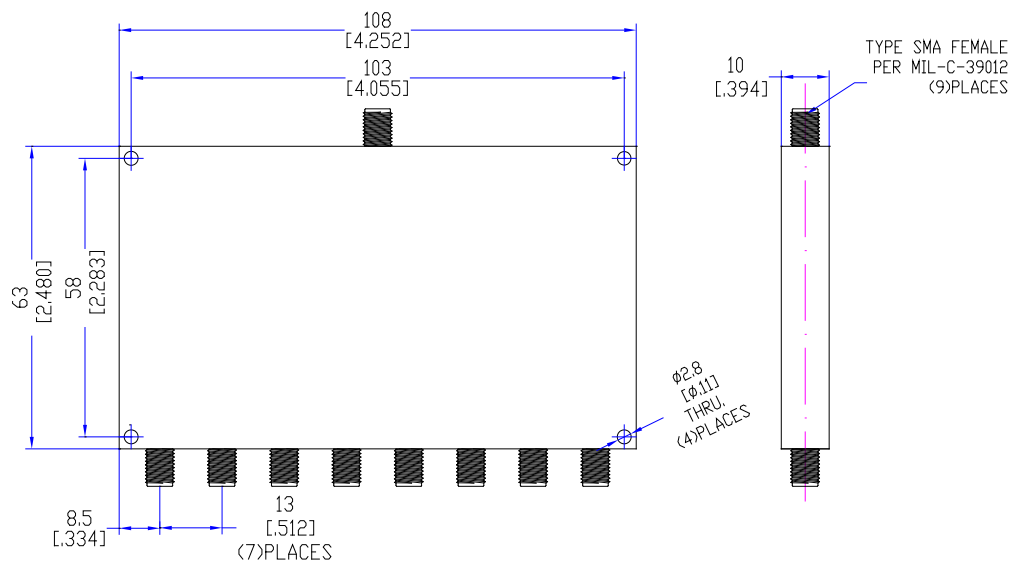

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com