8way 0° Power combiners/splitters

Model	Freq. Range (Ghz) F_L-F_U	Insertion Loss(dB)	Isolation (dB)	VSWR	Unbalance	
					Phase (Deg)	Amplitude(dB)
		Typ/Max	Typ/Min	Typ/Max	Max	Max
RMPD8-2500N	0.8-2.5	0.8/1.0	22/20	1.25/1.5	8	0.8

Note:

a. Input and output impedance: 50 Ohms
b. Connector: N-Female
c. Forward Power: ⩽50w
d. Case material:Aluminum alloy.
e. Guarantee: 12 months
f. Operation temperature:-35C-+80C deg
g. This part is RoHS compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

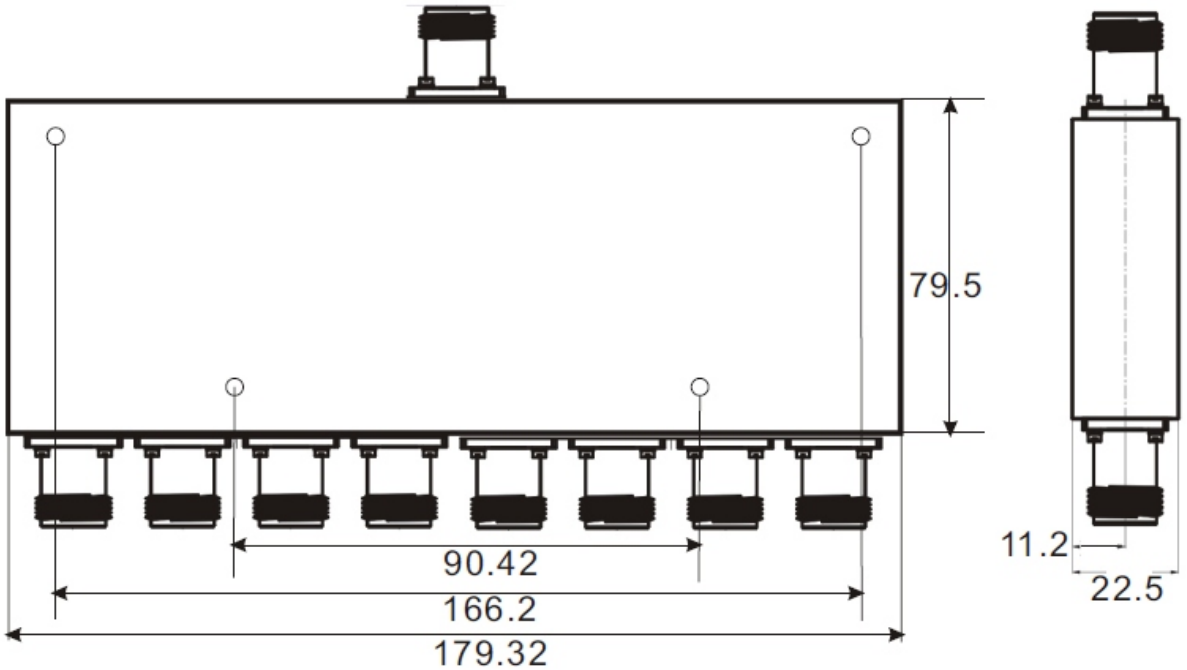

Add: 94 Jackson Rd, Suite 110 , Devens, MA 01434
Phone: (978) 772-3767 or (978) 772-3778, Fax: (978) 772-3768
E-mail: info@responsemicrowave.com