94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD8.4000-12000Sf 8-Way, 0º SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
4-12 GHz	0.6dB max	+/-8º max	1.60:1 typ	2.0dB typ	16dB min

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: SMA female 9 places**
c. **Power: Forward: 20W CW Reverse: 2 W**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -55C to +85C deg**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

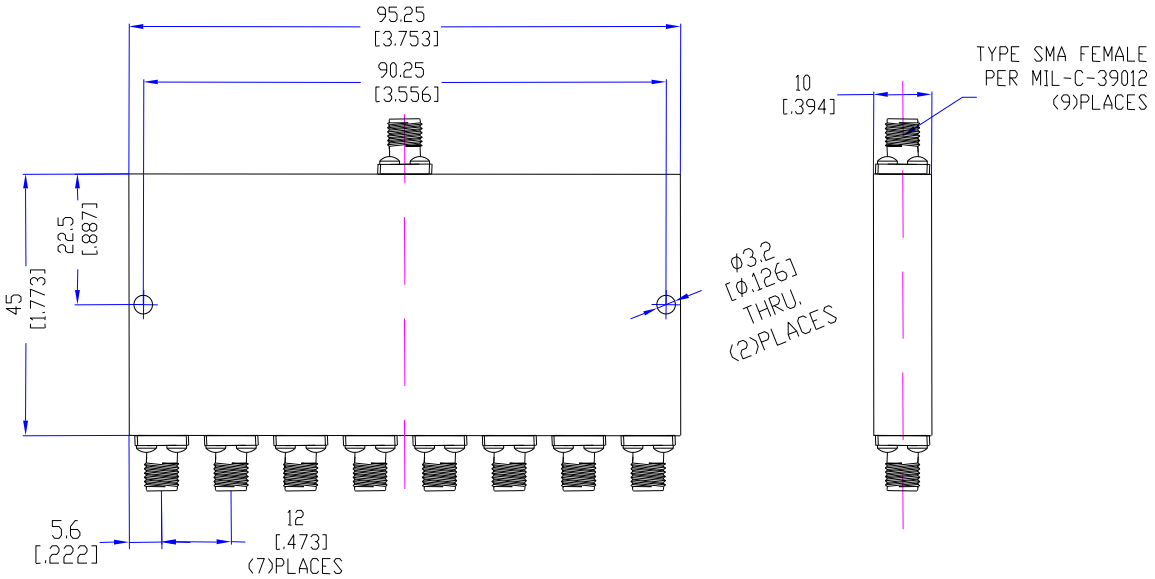

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com