94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD8.50-18000Sf — 8-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
0.05-18GHz	1dB max	+/-16° max	1.80:1 typ*	10dB max	13dB typ*

Notes:

a. Input and output impedance: 50 Ω
b. Connector: SMA female 9 places
c. Power: 30W forward, 1W reverse
d. Case material: Aluminum alloy w/black paint finish
e. Low band Spec 50-400MHz: VSWR = 5.5:1 Isolation 3dB
f. Operation temperature: -55°C to +85°C

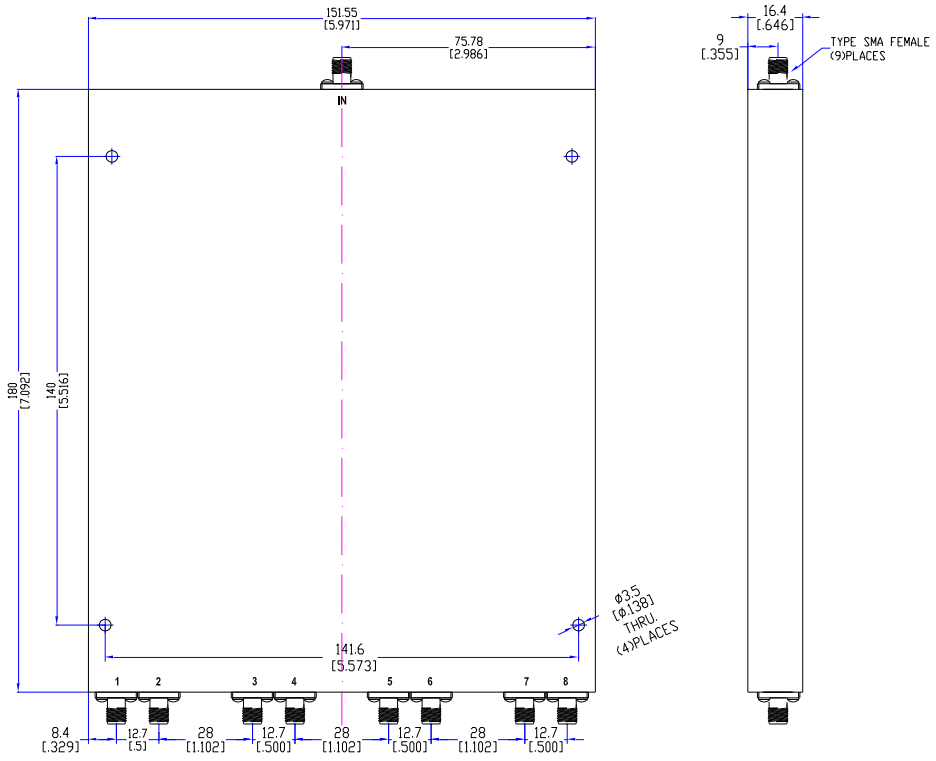

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com