94 JACKSON RD, STE 110, DEVENS, MA 01434

Power Dividers

Model RMPD8-500-2500Sfa — 8-way, High Power

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.5–2.5GHz	1.2dB max	18dB min	1.5:1 max	5º max	0.5 dB max

Notes:

a. Input and output impedance: 50Ω
b. Connector: In - SMA female (9 places)
c. Forward Power: ≤ 100W, Reverse: ≤ 10W
d. Case material: Aluminum alloy w/black paint
e. Operation temperature: -25°C to +65°C
f. RoHS compliant

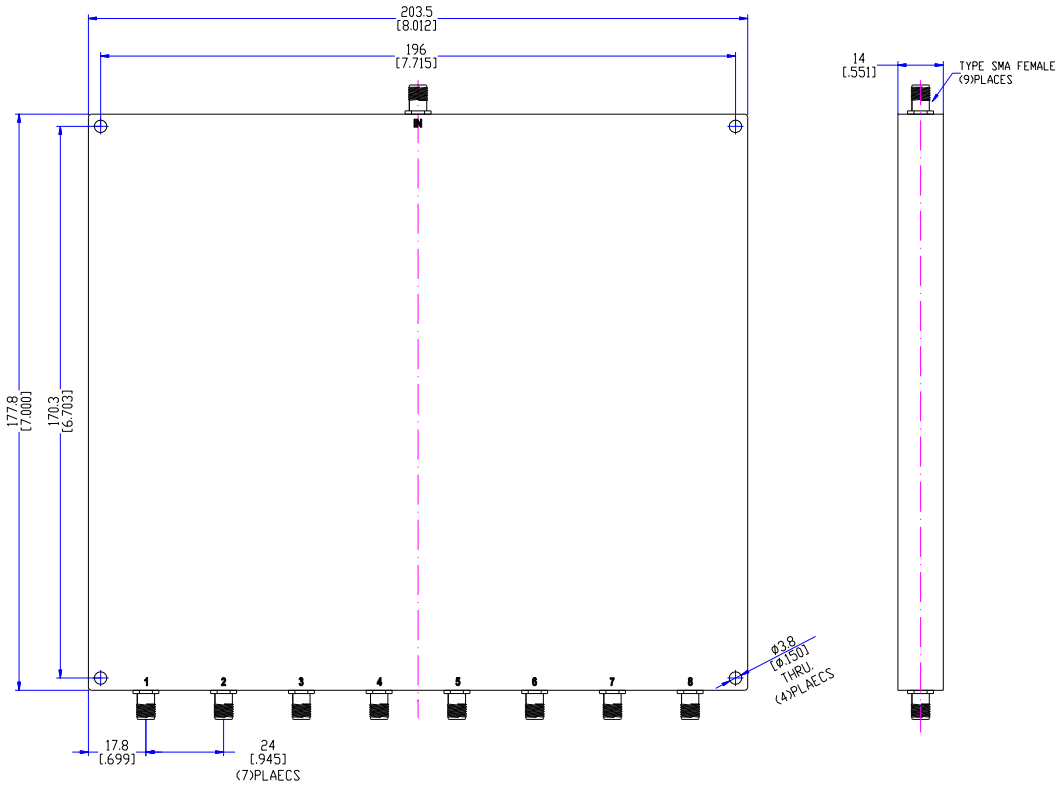

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 12/1/21