94 JACKSON RD, STE 110, DEVENS, MA 01434

Power Dividers

Model RMPD8-500-6000Nfb — 8 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.5–6GHz	2.4dB max 1.8dB typ	18dB min 20dB typ	1.7:1 max 1.45dB typ	8º max	0.6 dB max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female (9 places)**
c. **Forward Power: ≤ 35W, Reverse: ≤ 1W**
d. **Case material: Aluminum alloy w/clear iridite**
e. **Operation temperature: -35°C to +85°C**
f. **RoHS compliant**

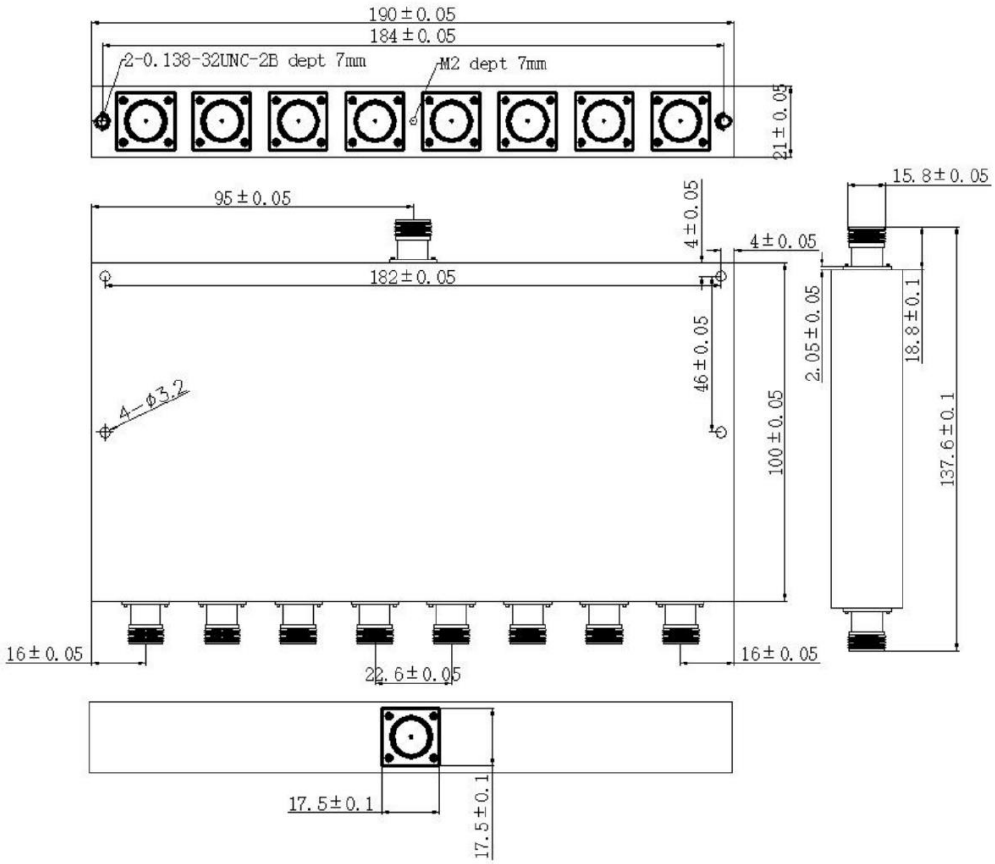

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 11/10/22