94 JACKSON RD, STE 110, DEVENS, MA 01434

Power Dividers

Model RMPD8-500-6000Sfb — 8 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.5–6GHz	2.4dB max	18dB min	1.6:1 max	6° max	0.6 dB max

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female (9 places)
c. Forward Power: ≤ 35W, Reverse: ≤ 1W
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -35°C to +85°C
f. RoHS compliant

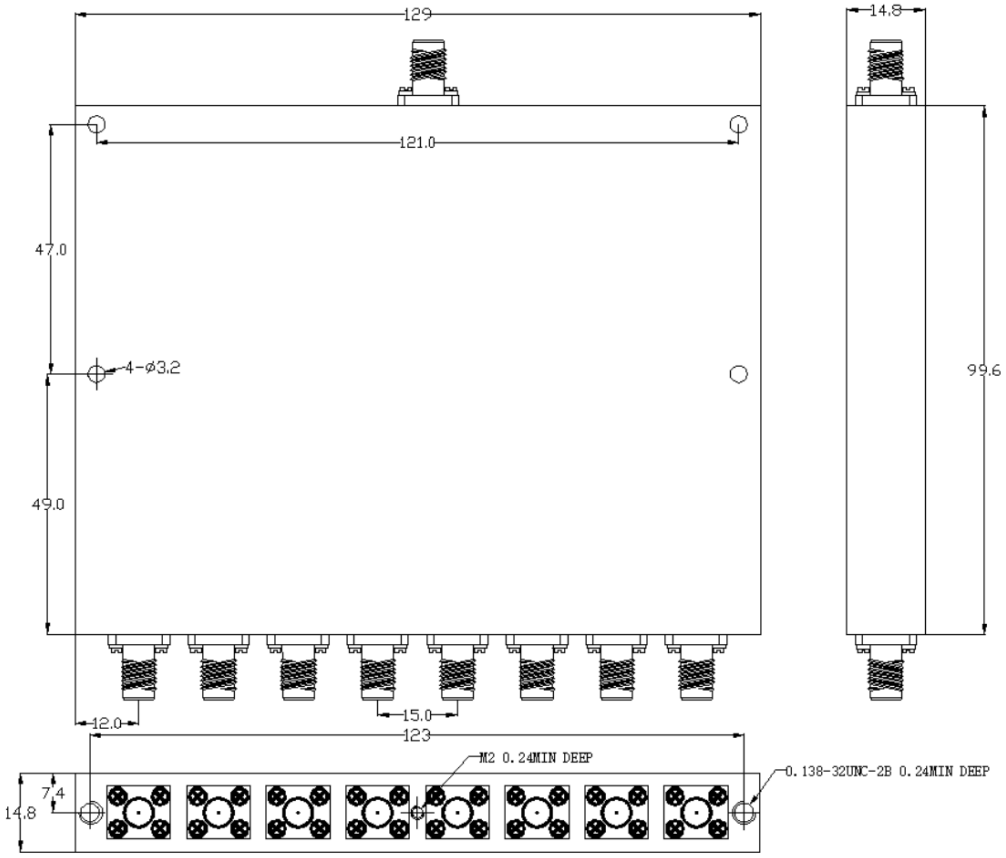

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com