94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD8.6-18Sf **8-Way, 0º SMA female**

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
6-18GHz	0.8dB max	+/-10º max	1.8:1 max	2.2dB max	16dB min

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female 9 places
c. Power: Forward 20 W
d. Case material: Aluminum alloy with black paint
e. Operation temperature: -55C to +85C deg

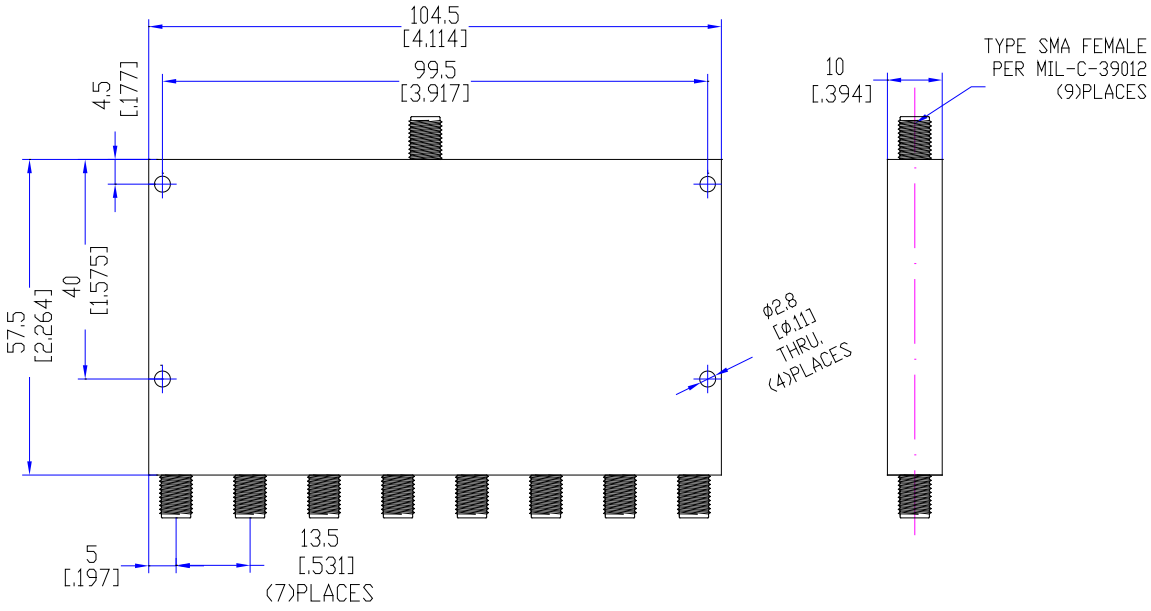

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 3/24/08