94 JACKSON RD, STE 110, DEVENS, MA 01434

Power Dividers

Model RMPD8-700-2700Nf 8-way, Type N female

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
700–2700MHz	1.4dB max	20dB min	1.4:1 max	5° max	0.5 dB max

Notes:

a. Input and output impedance: 50Ω
b. Connector: N female (9 places)
c. Forward Power: ≤ 50W, Reverse: ≤ 10W
d. Case material: Aluminum alloy w/clear iridite
e. Operation temperature: -55°C to +85°C
f. Weight: 400g
g. PIM: -110dBc typical

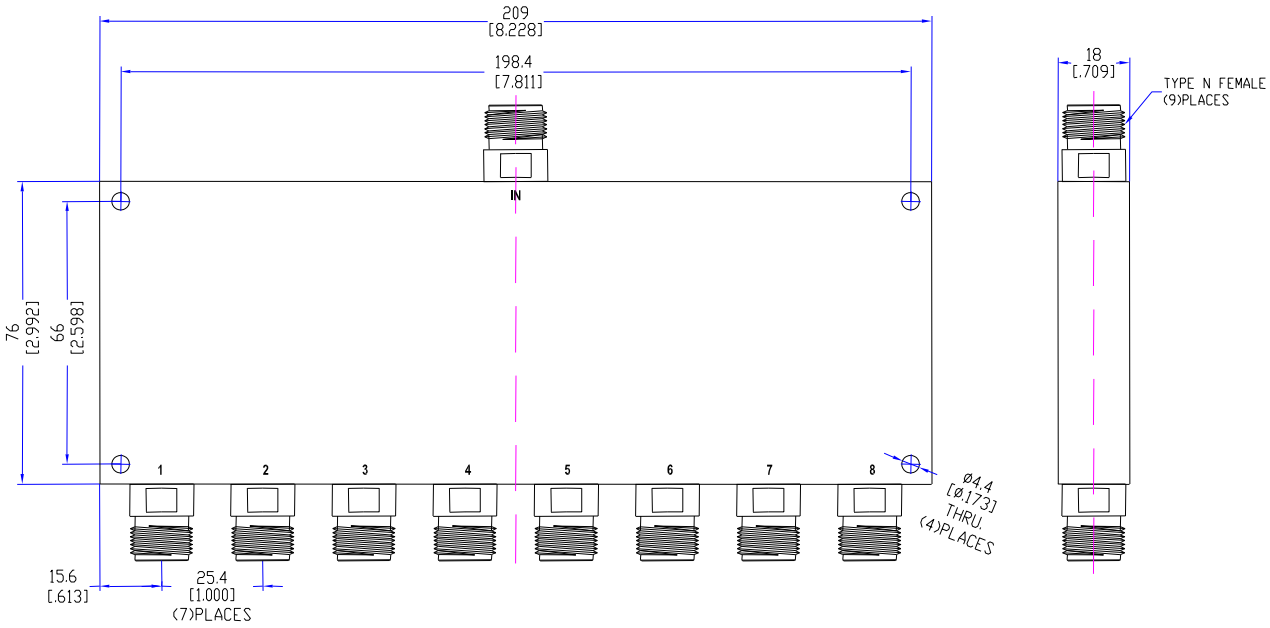

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 8/31/20