94 JACKSON RD, STE 110, DEVENS, MA 01434

Power Dividers

Model RMPD8-700-2700Sfa 8-way, SMA female

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
700–2700MHz	1.4dB max	18dB min	1.5:1 max	5° max	0.5 dB max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female (9 places)**
c. **Forward Power: ≤ 150W, Reverse: ≤ 40W**
d. **Case material: Aluminum alloy w/clear iridite**
e. **Operation temperature: -55°C to +85°C**

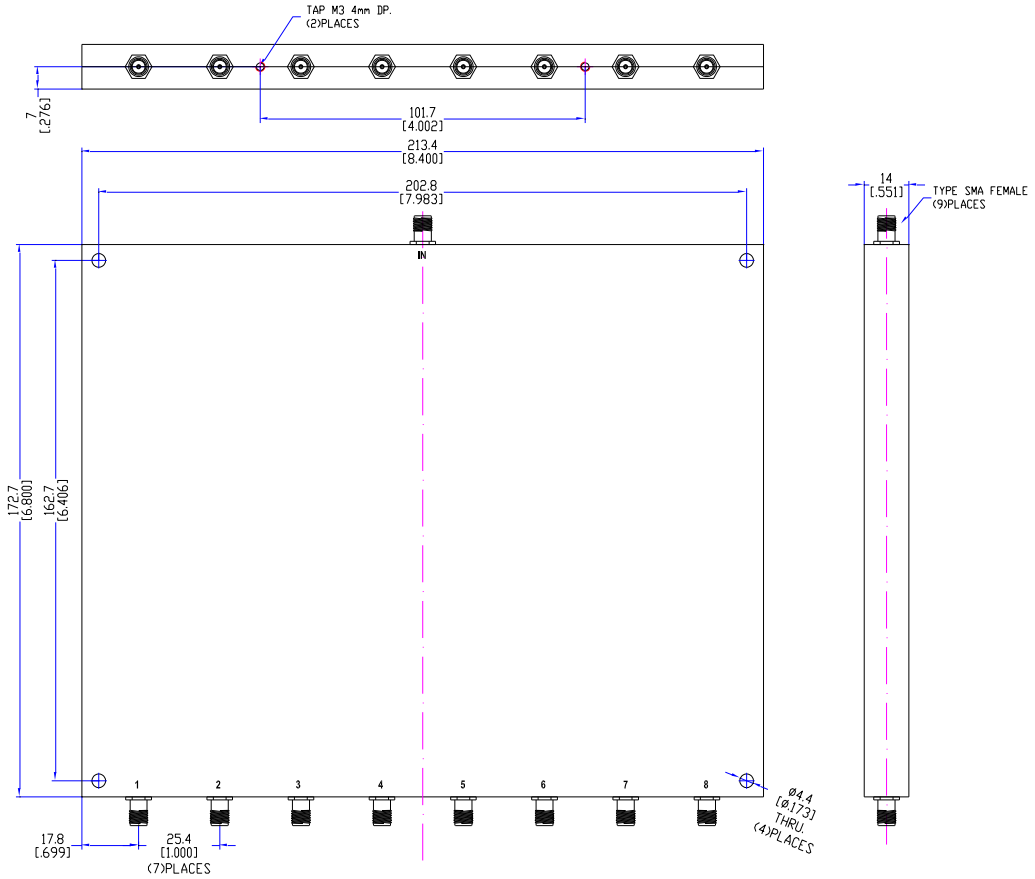

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 2/22/25