



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD8.8000-12400Sf

8-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
8-12.4GHz	0.4dB max	+/-6° max	1.6:1 max	1.2dB max	16dB min

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 9 places
- Power: 10W forward, 1W reverse
- Case material: Aluminum alloy w/black paint
- Designed to meet requirements of MIL-E-5400 and MIL-STD 202

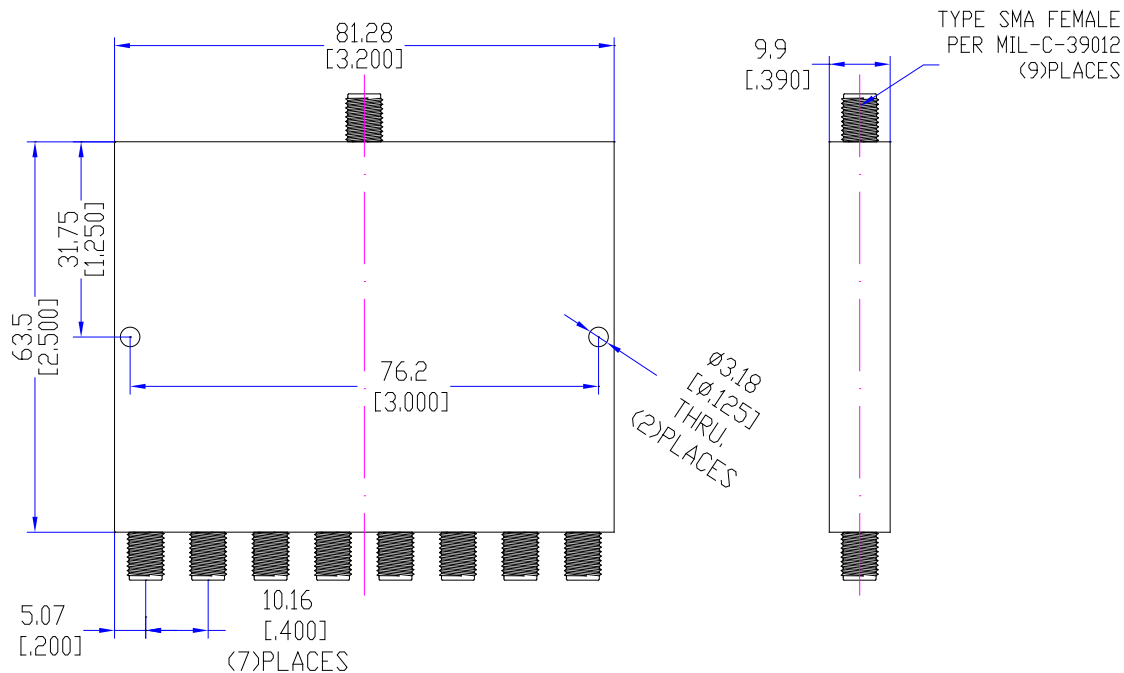

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com