



94 Jackson Road, Suite 110 Devens , MA 01434-4012 USA

TESTCABLZ™ - 70A Cable Assembly Specification Sheet

FEATURES:

Robust connector attachment
Custom lengths & varied connector series available
Flexible armoured diameter
DC-110GHz coverage
-0°C to +55°C operating temperature

Part Numbers

P/N	Description	Insertion Loss
RMCA4.TCBLZ70A.10mm	1.0mm male + 4" TCBLZ70A cable + 1.0mm male	2.6db max
RMCA6.TCBLZ70A.10mm	1.0mm male + 6" TCBLZ70A cable + 1.0mm male	3.4db max


Electrical Specification

Characteristic	
VSWR, max	1.40:1
Insertion Loss, max	See above
Characteristic Impedance	50Ω

Mechanical

Item	Material
Jacket	Multilayer armour
Mating cycles	5000 min
Crush Resistance	44KgF/cm
Min centerline bend radius	32mm"
Coupling Torque, nom	0.7Nm.

Typical Outline

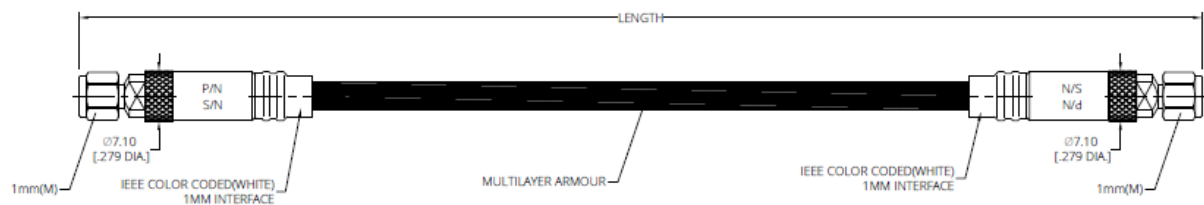

Telephone: 978-772-3767
www.ResponseMicrowave.com

Fax: 978-772-3768
Email: Info@ResponseMicrowave.com