



94 Jackson Road, Suite 110 Devens, MA 01434-4012 USA

TESTCABLZ™ - B7A Cable Assembly Specification Sheet

FEATURES:

Robust connector attachment
Custom lengths & varied connector series available
Flexible Armoured outer diameter with >2000 cycles durability
DC-40GHz coverage
-55°C to +125°C operating temperature

Part Numbers

P/N	Description	Insertion Loss
RMCA24.TCBLZB7A.292mm	2.92 male + 24" TCBLZB7A cable + 2.92 male	1.99dB max
RMCA36.TCBLZB7A.292mm	2.92 male + 36" TCBLZB7A cable + 2.92 male	2.79dB max


Electrical Specification

Characteristic	
Frequency	DC-40GHz
VSWR, max	1.25:1
Insertion Loss, max	See P/N
Amplitude stability vs flexure	+/-0.1dB
Voltage max	1000vrms
Phase stability vs flexure	+/-5°
Capacitance	87pf/mt
Shielding	90dB

Mechanical

Item	Material	Diameter
Outer Jacket	PTFE Wire (black&blue)	6.7mm
Min centerline bend radius	n/a	40mm

Typical Outline

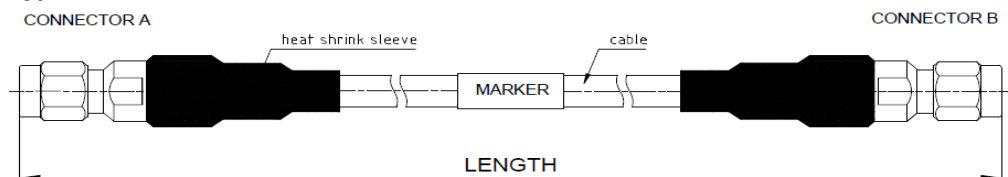

- 1 Center Conductor / Silver Plated Copper(Stranded)
- 2 Dielectric / Low Density PTFE
- 3 Inner Shield / Silver Plated Copper Tape
- 4 Inter layer / PTFE, Wrapped
- 5 Inner Braid / Silver Plated Copper Wires
- 6 Inner Jacket / FEP, Blue
- 7 Spring Member / Stainless Steel Wire
- 8 Outer Braid / Silver Plated Copper Wires
- 9 Waterproof Layer / PI+PTFE
- 10 Outer Jacket / PTFE Wire, Blue And Black

Telephone: 978-772-3767
www.ResponseMicrowave.com

Fax: 978-772-3768
Email: Info@ResponseMicrowave.com