



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.2-18Sf180


180° 3dB SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Isolation	Phase
2 - 18GHz	3dB	+/- 0.8dB	1.60:1	2.8dBmax	18dBmin	+/-14°

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 4 places
- Power: Forward/Reverse ≤ 50 W avg/1KW peak
- Case material: Aluminum alloy with black paint
- Connectors: stainless/passivate
- Operation temperature: -55°C to +85°C
- Operating Humidity up to 90% non-condensing

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

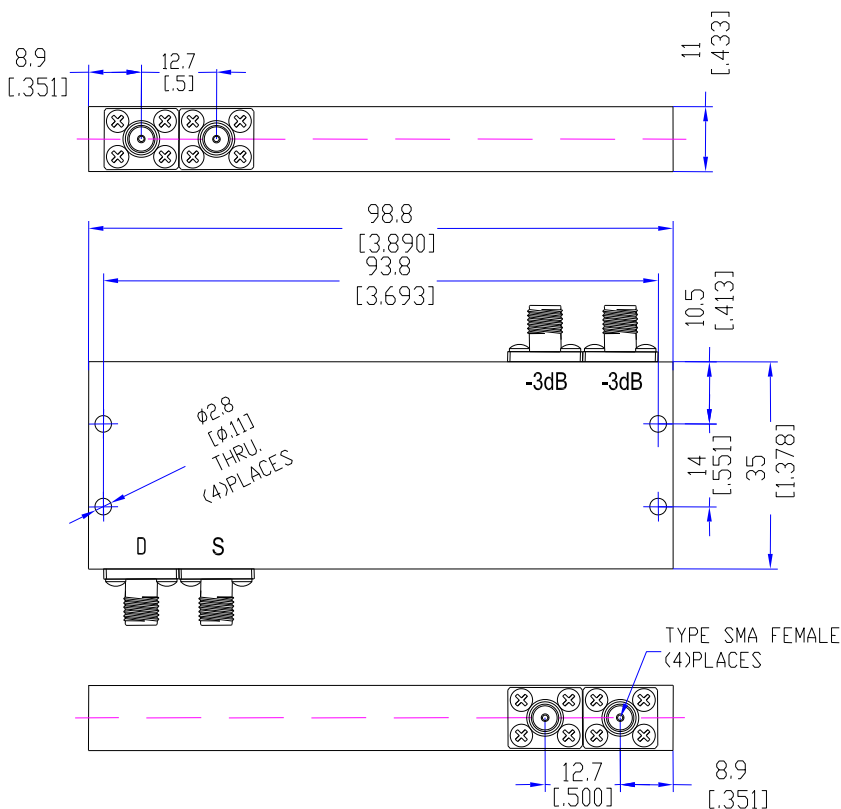

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com