



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.2-20Sf


3dB SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Isolation
2 - 20GHz	3.1dB	+/- 8dB	1.50:1	1.7 dBmax	16dBmin

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 4 places
- Power: Forward/Reverse ≤ 50 W avg/3KW peak
- Case material: Aluminum alloy with black paint
- Connectors: stainless/passivate
- Operation temperature: -40C to +70C deg
- Operating Humidity up to 90% non-condensing

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B & AAS, EPA3060A & EPA7196, EPA3052 & AAS, EN1122: 2001 & AAS, EPA3540C & GC-MS

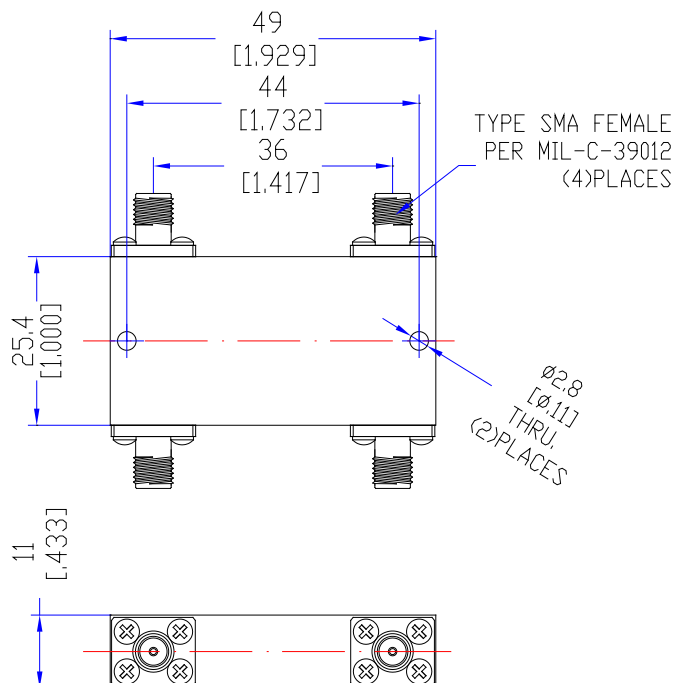

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com