94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.2000-2300Sf180 3dB Quadrature Hybrid - 180°

Electrical Specifications:

Frequency	Coupling	Unbalance	VSWR	InsertionLoss	Isolation	Phase
2 – 2.3GHz	3 .01dB	+/-0.4dB	1.3:1max	0.5dB max	18dB min	+/-4°max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female (4) places**
c. **Case material: Aluminum alloy w/black paint**
d. **Power: 30W CW, 1KW peak**
e. **Operation temperature: -35°C to +80°C**
f. ***RoHS Compliant* per Council Directive 2002/95/EC**

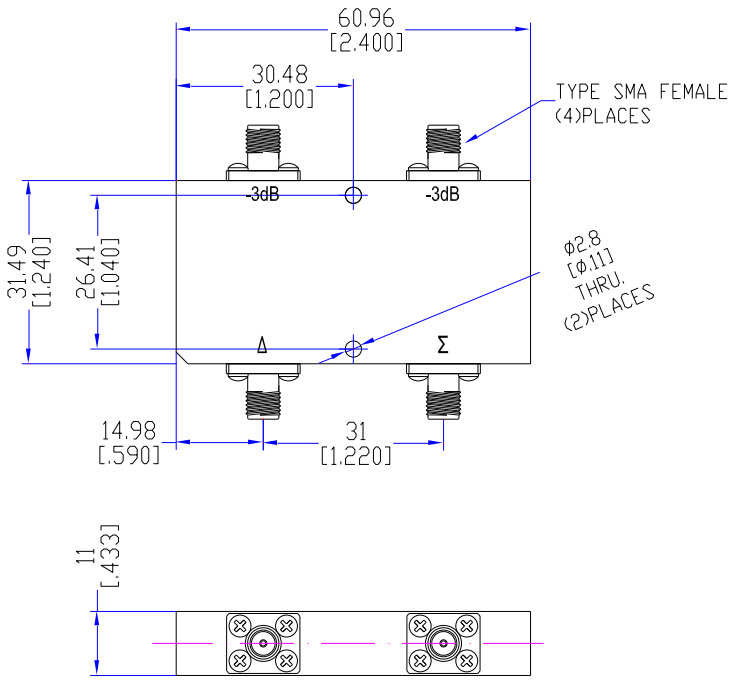

Dimensions in mm. A specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com