



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.2000-8000Nf


3dB Quadrature Hybrid - 90°

Electrical Specifications:

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Isolation	Phase
2 - 8GHz	3 +/- 1.0dB	+/-0.5dB	1.4:1max	0.8dB max	18dB min	+/-5°max

Notes:

- Input and output impedance: 50Ω
- Connector: N female (4) places
- Power: 30W CW, 1KW peak
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +85°C
- RoHS Compliant per Council Directive 2002/95/EC

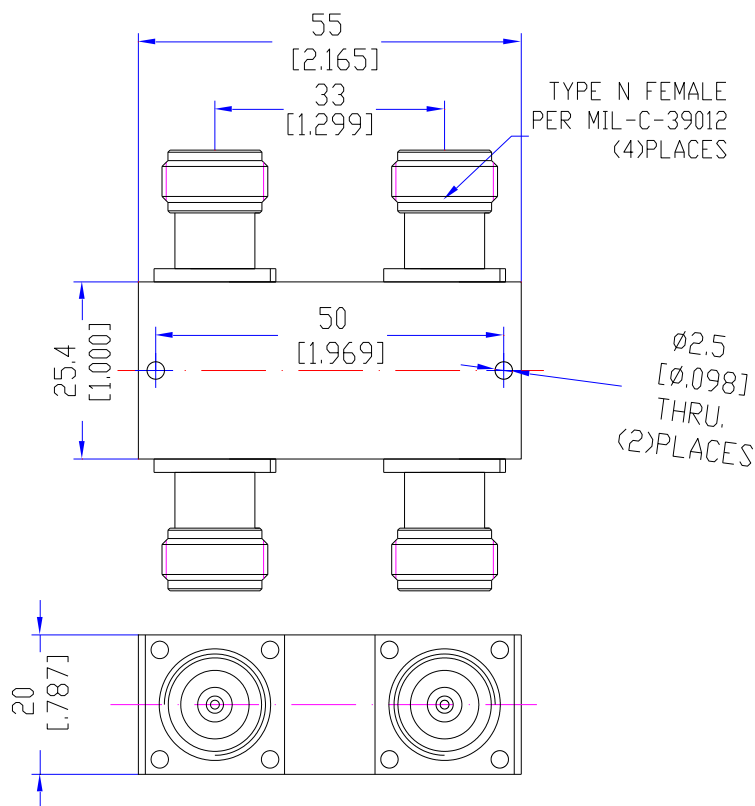

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com