94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.400-800Nfa 3dB, 90° - N female

Electrical Specifications:

Frequency	Coupling	Amplitude	VSWR	InsertionLoss	Isolation	Phase
400-800MHz	3.0dB	+/- 0.5dB	1.1:1max	0.4dB max	22dB min	+/-4°

Notes:

a. Input and output impedance: 50 Ω
b. Connector: N female (4) places
c. Power: 200W avg/3KW peak
d. Case material: Aluminum alloy/black paint
e. Operation temperature: -40°C to +85°C

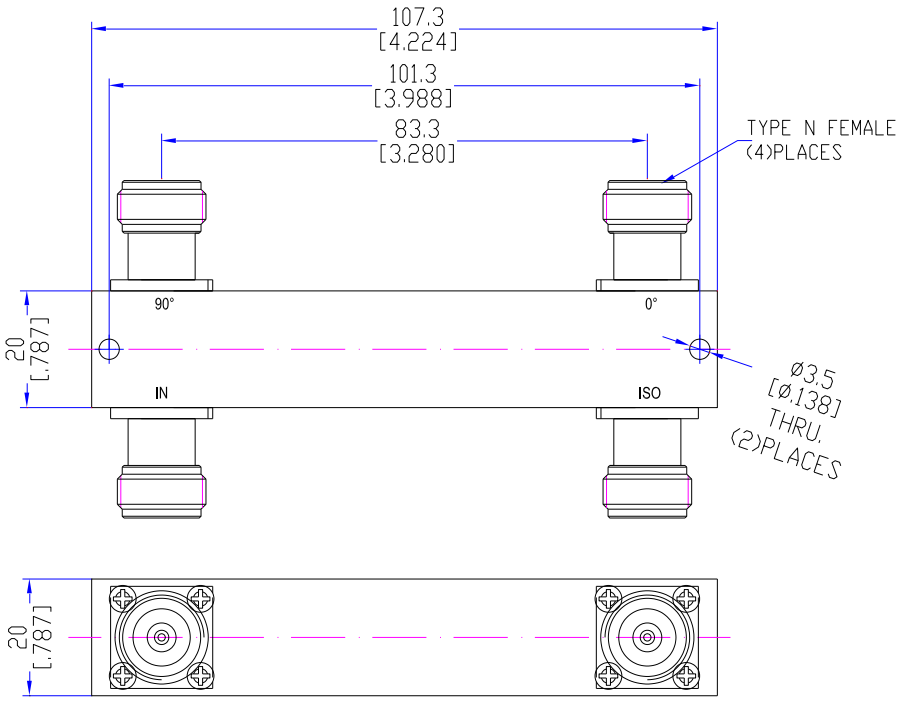

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 04/28/22