



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.470-870Nfa


3dB Quadrature Hybrid - 90°

Electrical Specifications:

Frequency	Coupling	Unbalance	VSWR	InsertionLoss	Isolation	Phase
470-870MHz	3 +/- 1.0dB	+/-0.4dB	1.15:1max	0.4dB max	25dB min	2°max

Notes:

- Input and output impedance: 50 Ω
- Connector: N female (4) places, brass/nickel
- Power: 250W avg, 3KW peak
- Case material: Aluminum alloy w/black paint
- Operation temperature: -40°C to +85°C
- RoHS Compliant** per Council Directive 2002/95/EC

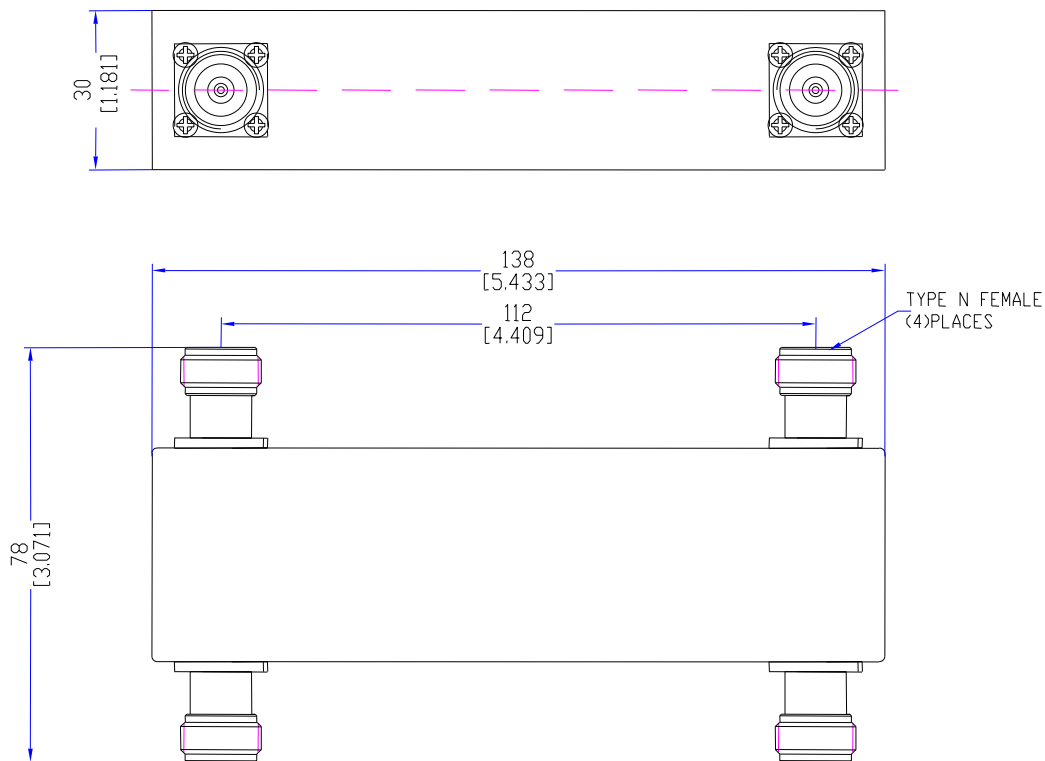

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com