



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.500-2500Sf


3dB Quadrature Hybrid - 90°

Electrical Specifications:

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Isolation	Phase
0.5-2.5GHz	3 +/- 1.0dB	+/-0.4dB	1.25:1max	0.5dB max	23dB min	4°max

Notes:

- Input and output impedance: 50Ω
- Connector: N female (4) places
- Power: 200W avg, 1KW peak
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +85°C
- RoHS Compliant** per Council Directive 2002/95/EC

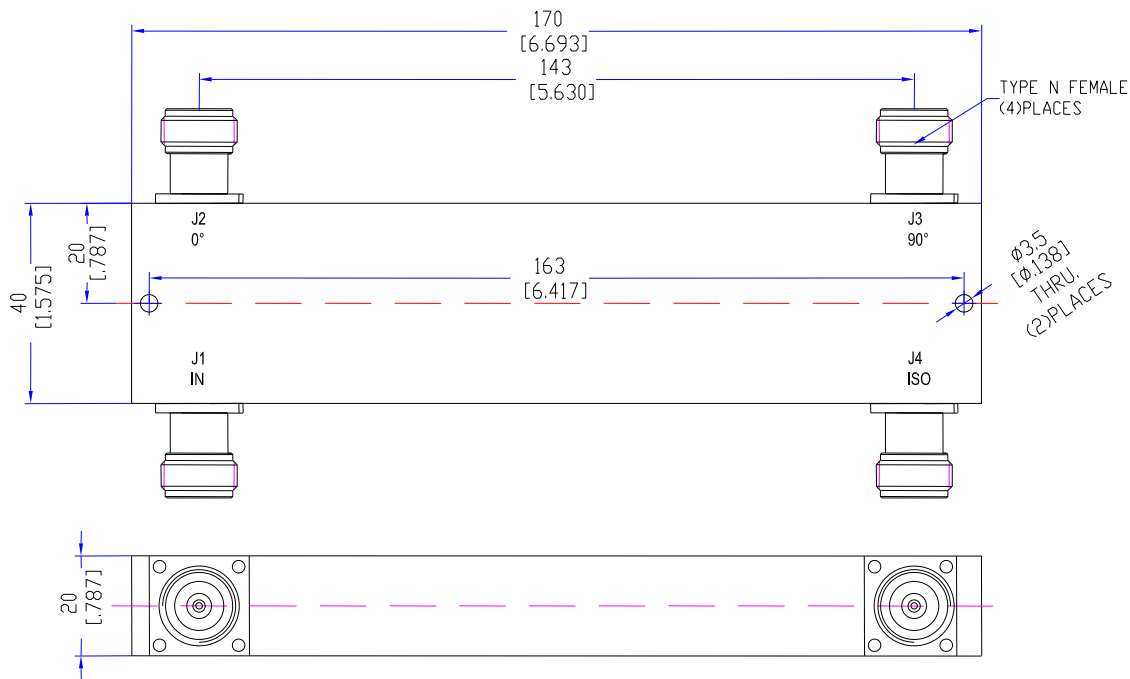

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com