94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.6000-11000TNCf 3dB, 90° TNC female

Electrical Specifications:

Frequency	Coupling	Unbalance	VSWR	InsertionLoss	Isolation	Phase
6 - 11GHz	3 +/- 1.0dB	+/-0.8dB	1.50:1max	1.2dB max	14dB min	8° max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: TNC female (4) places**
c. **Power: 125W CW, 3KW peak**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -35°C to +85°C**
f. ***RoHS Compliant* per Council Directive 2002/95/EC**

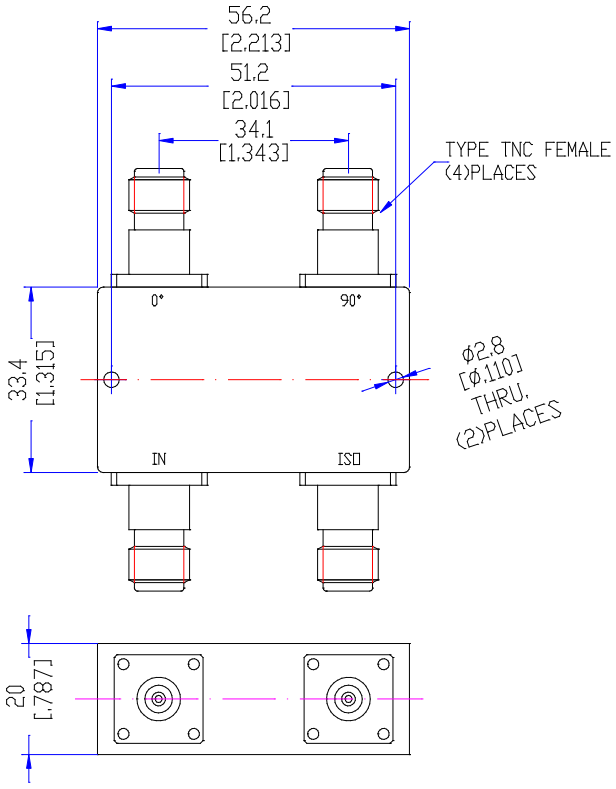

Dimensions in mm. A specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 07/2/15