



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Quadrature Hybrid

Model RMHY3.800-3000Nf180


3dB 180° Hybrid - N female

Electrical Specifications:

Frequency	Coupling	Amplitude	VSWR	Insertion Loss	Isolation	Phase
0.8-3GHz	3.1dB	+/- 0.9dB	1.5:1max	1dB max	16dB min	+/-10°

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female (4) places
- Power: 50W avg/1KW peak
- Case material: Aluminum alloy/black paint
- Operation temperature: -35C to +80C deg
- RoHS Compliant** per Council Directive 2002/95/EC

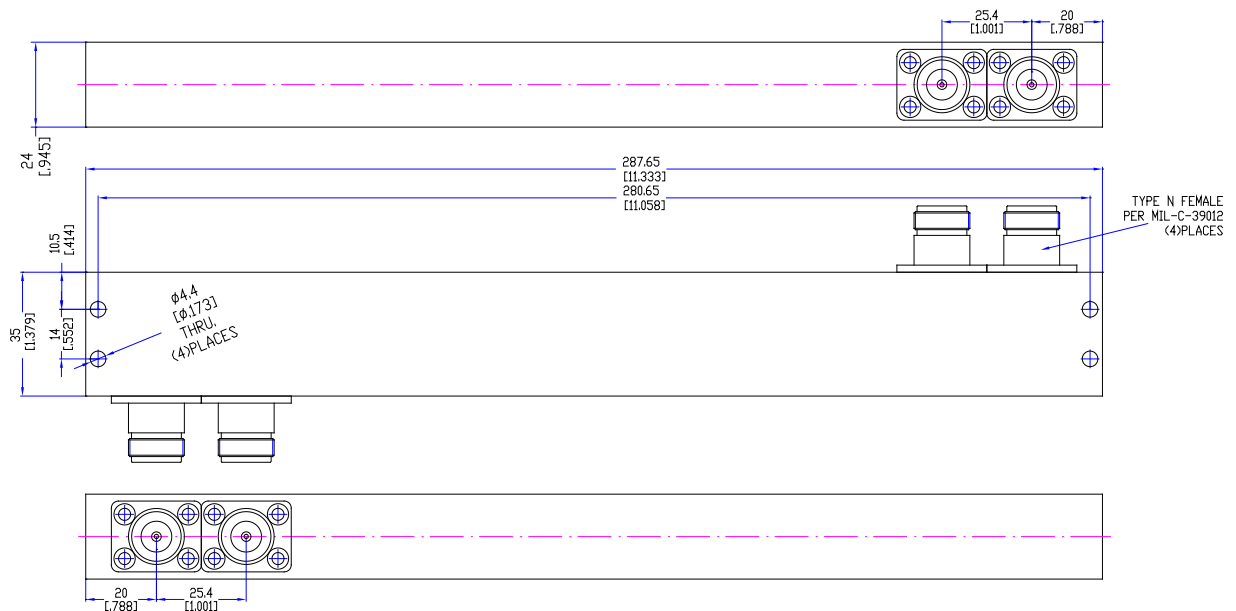

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com