



94 JACKSON ROAD, SUITE 110, DEVENS , M A 0 1 4 3 4

Coaxial Rotary Joints


Model RMRJ.18000Nff

In-line, Type N female

Frequency	Insertion Loss	Rotational Effect (WOW)	Rotational Speed (continuous)	VSWR	Starting Torque (max)
DC-18GHz	0.2dB max	2°/360°	300rpm	1.22:1 max	8oz-in

Notes:

- Input and output impedance: 50Ω
- Connector: Type N female
- Average Power: 200W @ 1GHz
- Case material: Brass/silver-plate
- Operation temperature: -35°C to +85°C
- Life tested to over 5 million revolutions

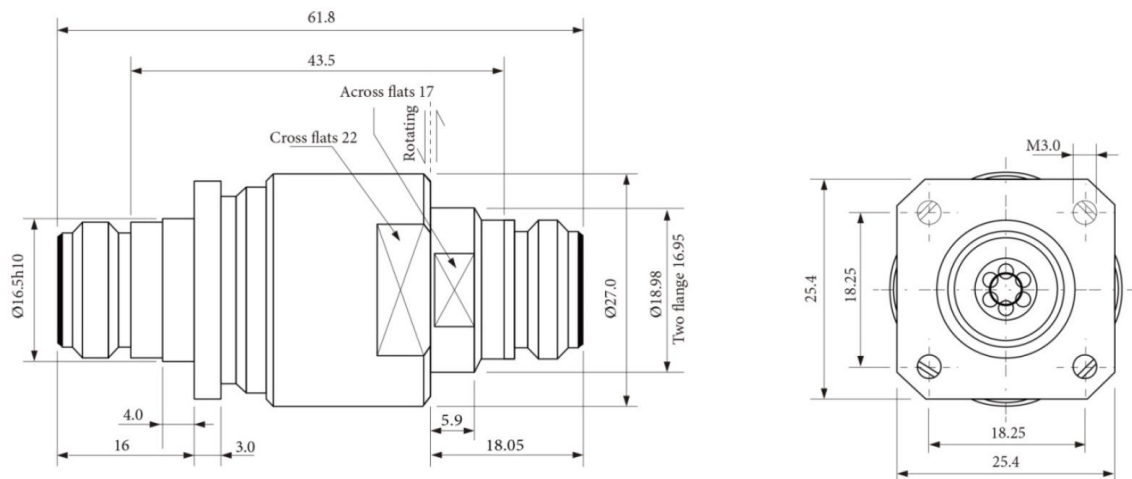

Dimensions in inches. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com