



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

TERMINATIONS


Model RMTE.12400Nf100

100W, N female

Frequency	Power Nominal	VSWR	Impedance	Weight
DC-12.4GHz	100 watts	1.35:1	50 Ω	1.6 pounds

Notes:

- Case Materials/Plating:
Housing: Aluminum/black iridite
Connector: brass/ternary
Center Contact: BeCu/gold
Resistive element: Thin film/alumina
- Operation temperature: -55°C to +125°C
- Peak Power: 5KW (5us pulse width/1% duty cycle)
- Connector is N female (N male available on request)

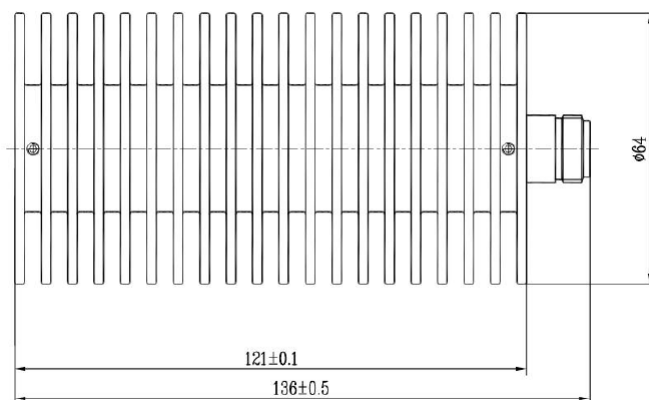

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com