



94 J A C K S O N R O A D, S U I T E 110, D E V E N S, M A 0 1 4 3 4

## TERMINATIONS

ROUND


Model RMTE.12400Nm100

100W, N male

| Frequency  | Power Nominal | VSWR   | Impedance |
|------------|---------------|--------|-----------|
| DC-12.4GHz | 100 watts**   | 1.25:1 | 50Ω       |

**Notes:**

- Case Materials/Plating:  
Housing/fins: Aluminum/black iridite  
Connector: brass/ternary  
Center Contact: BeCu/gold  
Resistive element: Thin film/alumina
- Operation temperature: -55°C to +125°C
- Average Power @ 25°C derated linearly to 10w @ 125°C
- Peak Power: 5KW (5us pulse width/0.5% duty cycle)
- Connector is N male (N female available on request)

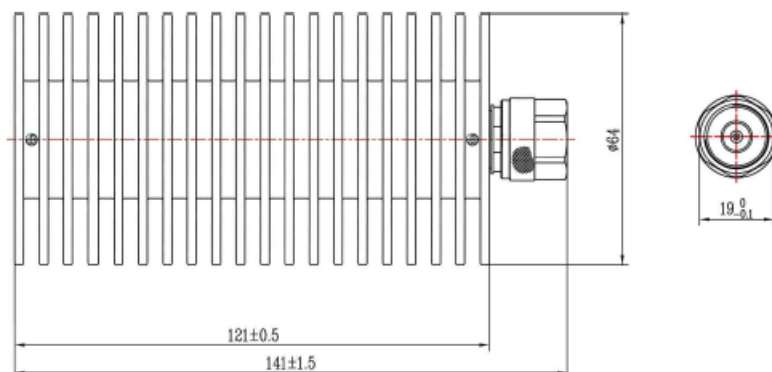

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)