



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS



Model RMTE.164-174.Nf250

N female

Frequency	Power Average	Power Peak	Impedance	VSWR
164-174MHz	250 watts*	1Kw/50us	50Ω	1.15:1 max

Notes:

- Case Materials/Plating:
Housing: aluminum/iridite
Fins: aluminum/black anodized
Center Contact: Gold plated brass per MIL-G-45204
Dielectric: PTFE
Connector: brass/nickel
- Operation temperature: -55°C to +85°C
- *Power is ambient and de-rated linearly over temperature

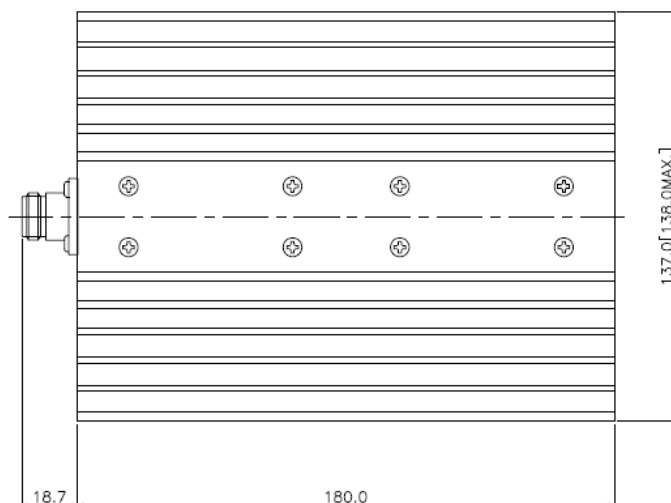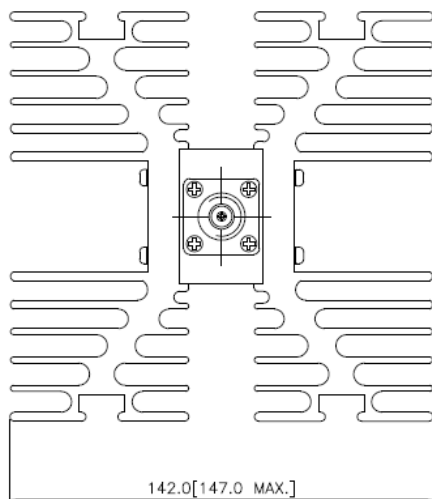

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com