94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.18000.Sf50 50ohm, SMA female

Frequency	Power Avg	Impedance	VSWR
DC-18 GHz	50 W	50ohm	1.40:1max

Notes:

a. **Case Materials/Plating:**
   Housing: Aluminum anodize
   Center Contact: Gold plated BeCu

b. **Temperature Range: -55° to +85° C**

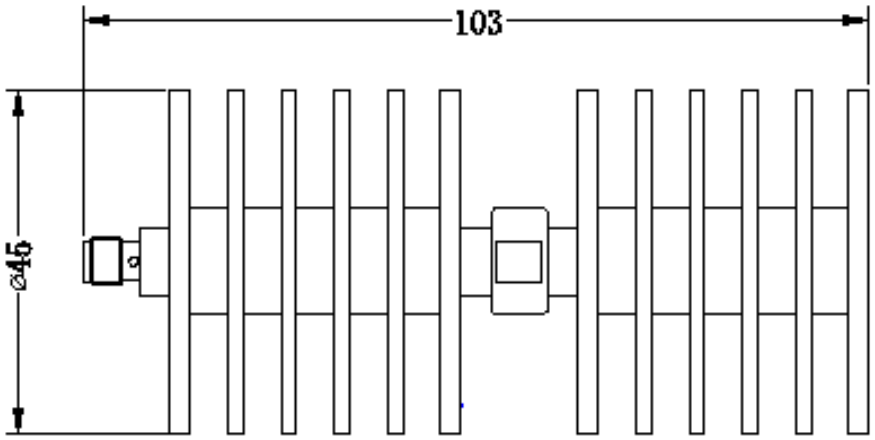

Dimensions in mm. All specifications are subject to change without notice

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com