



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.18000.Sm1

Screw-on, 50Ω, SMA male

Frequency	Power Input	Power Peak	VSWR
DC-18 GHz	1 W	150W	1.20:1 max

Notes:

- a. Case Materials/Plating:
Housing: Stainless steel/passivate
Coupling Nut: Stainless steel/passivate
Center Contact: Gold plated BeCu
Resistive element: Thin film
Resistor substrate: Alumina
- b. Operation temperature: -55°C to +125°C
- c. C suffix = 2" bead chain and eyelet

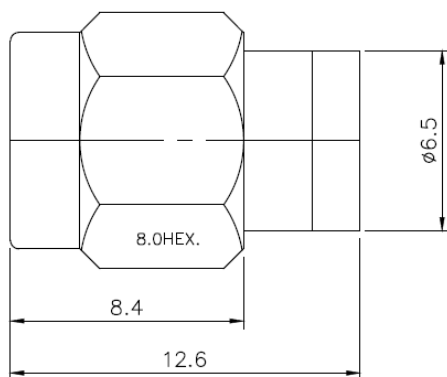

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com