94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.18000.Sm2 Screw-on, 50Ω, SMA male

Frequency	Power Input	Power Peak	VSWR
DC-18 GHz	2 W	150W	1.20:1 max

Notes:

a. **Case Materials/Plating:**
   Housing: Brass/gold plate
   Coupling Nut: stainless/passivate
   Center Contact: Gold plated BeCu
   Resistive element: Thin film
   Resistor substrate: Alumina
b. **Operation temperature: -55°C to +125°C**
c. **C suffix = 2" bead chain and eyelet**

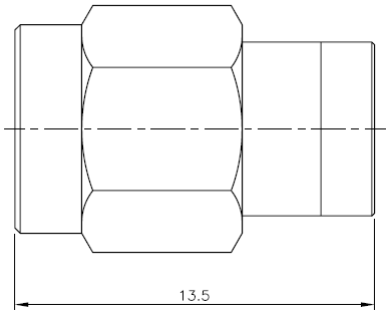

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com